

Riverine Infrastructure Database - Data Compilation

Contents:

1. **General**
2. **Work Sequence**
3. **Dataset Preparation - Project Development**
4. **Dataset Deliverables - Project Development**
5. **Flood Observation Datasets**
6. **Dataset Repository / Tracking (DOT)**

1. **General**

This document outlines integration of the development of Riverine Infrastructure Database (RIDB) datasets with the IaDOT project development process. Also addressed are partial datasets developed as a result of flood event observations.

The document 'Riverine Infrastructure Database - Data Guidelines', referenced herein as 'RIDB Guidelines', provides detailed specifications and methodologies for development of datasets at RIDB sites. The default IaDOT project development process will generally provide the data needed for an RIDB dataset. To better integrate with the project development process the RIDB deliverable format addressed in the RIDB Guidelines are modified herein.

A complete RIDB dataset for a riverine crossing will generally consist of:

- A site summary.
- A feature summary. Features are structures (bridges/larger culverts) or low road locations.
- A frequency-discharge and stage-discharge relationship for each feature (generally a single relationship is representative of multiple/all features).
- The planimetric location of each feature.

With an RIDB dataset developed for a site, the impact during a flood event on critical features, such as low beam for a steel bridge, or inundation of traffic lanes, can be assessed.

2. **Work Sequence**

For project development related to replacement of a structure at a riverine location the Preliminary Bridge Engineer shall be contacted to determine if an RIDB dataset is required for the site. A riverine location for this purpose is a stream crossing a waterway having a drainage area greater than 10 sq. mi. If a dataset is required, the RIDB network location will be provided for reference (StreamName_RM, ex lowaR_10.0).

A. **Project Development Concept**

Upon initiation of concept development work the Preliminary Bridge Engineer shall be contacted.

The RIDB determination should be made before work begins since hydraulic studies will generally be made as a part of concept development.

Riverine Infrastructure Database Data Collection - Data Compilation

A paragraph will be placed in the Project Concept Statement depending on the RIDB determination as follows:

RIDB Required: "A Riverine Infrastructure Database (RIDB) dataset will be developed as a part of this project. The RIDB network location is StreamName_RM."

RIDB Not Required: "A Riverine Infrastructure Database (RIDB) dataset will NOT be developed as a part of this project."

If a RIDB dataset is required, project development data collection and hydraulic analysis will comply with the RIDB Guidelines at a minimum.

B. Project Development Post-Concept

For project development that is underway (post-concept) but not yet complete the Preliminary Bridge Engineer should be contacted as early as possible in the process. If a RIDB dataset is required, project development data collection and hydraulic analysis will comply with the RIDB Guidelines as much as practicable. Exceptions to the RIDB Guidelines shall be noted as addressed in the following sections.

C. Flood Observations

Contact the Preliminary Bridge Engineer per the above for a RIDB dataset determination/network location. Dataset development will comply with the RIDB Guidelines as much as practicable. Exceptions to the RIDB Guidelines shall be noted as addressed in the following sections.

3. Dataset Preparation - Project Development

A. Survey / Lidar Tile List / Datum Correlation

Survey data collection should be conducted per the RIDB Guidelines, Sect. 6. All site features as defined in Sect. 4 that fall within the riverine crossing shall be included.

For data collected under project development projects the requirements Sect. 6.A. and 6.B.4 are waived. Data collection procedures, exported data projection and reference point establishment shall be per project development survey standards.

The Lidar Tile list required per Sect. 3.D. is waived since a comprehensive DTM is developed through the project development process.

The Survey Submittal requirements of 6.D. are waived. Deliverable shall be per project development survey standards.

The Vertical Datum Correlation requirements of Sect. 6.B. are to be maintained. If the project datum is not based on IaRTN, correlation of project datum to IaRTN should be a priority.

Note: IaRTN(2011) refers to orthographic heights determined using the Iowa Real Time Network (IaRTN) using the NAD83(2011) datum. IaRTN(CORS96) refers to heights determined prior to the NAD83(2011) datum.

B. GIS Location/Feature Mapping

GIS location and feature mapping requirements per Sects. 2.B. and 4.C are waived.

In lieu of the the GIS mapping requirements a Microstation file will be provided with the site features mapped similar to the requirements of Sect. 4.C. The Microstation file should only contain one model, with the features mapped into that model (required to facilitate use in GIS software). The linear elements only need to be tagged with the MaintNo or other code to

Riverine Infrastructure Database Data Collection - Data Compilation

correlate with element with the data summary. Any level is acceptable, with the line(s) and text placed on separate levels.

Notes: Tag the file name with the projection to facilitate reprojection in GIS software (ex. _IaSPN Iowa State Plane North, _IA09 Iowa RCS Zone 9).

Map culverts along culvert alignment (end to end).

C. Existing / Proposed Facilities


For development projects separate datasets will be required for existing and proposed condition as addressed in the following sections.

4. Dataset Deliverables - Project Development

The RIDB Guidelines, Sect. 7 regarding submittal for a RIDB Dataset produced under project development are modified. Deliverables required are as follows:

| | |
|---------------------|---|
| Site Summary.txt | RIDB Site Summary in .txt format |
| Feature Summary.txt | Site Feature Summary in .txt format |
| FQ.csv | Frequency-Discharge data in .csv format |
| QH.csv | Discharge-Stage data in .csv format |
| Features.dgn | Feature mapping in Microstation format |

An example dataset is as follows. The “_GIS_Entry . . . header will be provided by the database coordinator.

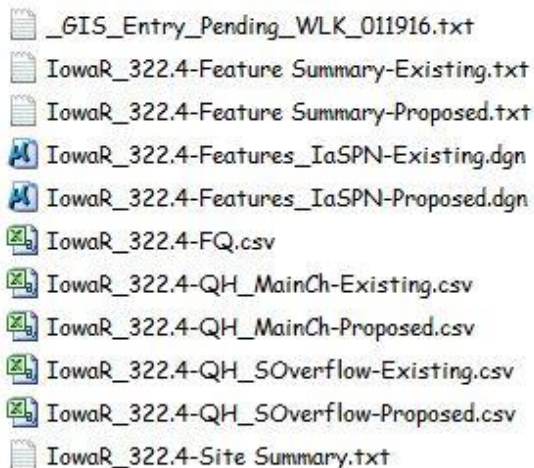

A. Site / Feature Summary

These documents are provided in .txt format to allow editing/updating by the database coordinator as required. A template file is available. Example files are as follows.

Riverine Infrastructure Database Data Collection - Data Compilation

Site Summary:

Stream ID: IowaR
River Mile: 322.4
Description: US 69 over Iowa River, 1.5 Mi. S of Belmond
Drainage Area: 398 Sq Mi
Rating Location: IowaR_322.4
Hydrology Methodology: Gage weighted AEPD Estimate, Gage 05449500, Iowa River near Rowan
Hydraulics Methodology: Tuflow 2D Model
Rating Locations -
MainCh h5 Chan 150' US Br
SOverflow-Exist h90 MP 172.66 EX 200' S Br
SOverflow-Proposed h94 Alt20 MP 172.58 313+ 1050' S Bridge

Datum: NAVD88 IaRTN(CORS96) (Project Datum)
NAVD88 IaRTN(2011) (-) 0.13 FT = Project Datum (IaRTN(CORS96))
Lidar Datum Correlation - IA Statewide Lidar NAVD88 (-) 0.4' = Project Datum
Design 155 Datum (+) 1069.75' = Project Datum (approx)
Assume NGVD29 datum ~ Project Datum in study reach.
2008 Flood Study Datum ~ Project Datum

Site Development Status: Complete.
Site Analysis File Location: BRF-069-7(30)-38-99 Proj Dir: 9906901008

Feature Summary - Existing:

Stream ID: IowaR
River Mile: 322.4
Description: US 69 over Iowa River, 1.5 Mi. S of Belmond
Status: Existing
Feature:
Type: Bridge
Maint. No.: 9972.8S069
FHWA No.: 54300
Conveyance Location: Main Channel
Low Beam Elev.: 1168.3
Rating Curve: MainCh-Existing
Description: 214'x28' Concrete Slab, Frame/Pile Bent Piers,
Concrete High Abutments (Des. No. 155)

Feature:
Type: Low Roadway
Maint. No.: 9972.7-069
FHWA No.: 90054300
Conveyance Location: South Overflow
ETW Elev.: 1166.9
Rating Curve: SOverflow-Existing
Description: 0.10 Mi. S. of main channel bridge

Riverine Infrastructure Database Data Collection - Data Compilation

Feature Summary - Proposed:

Stream ID: IowaR

River Mile: 322.4

Description: US 69 over Iowa River, 1.5 Mi. S of Belmond

Status: Proposed BRF-069-7(30)-38-99
Replacement of main channel bridge
Addition of S Overflow RCB
Modification of S Overflow road overtop

Feature:

Type: Bridge

Maint. No.: 9972.85069

FHWA No.: 54301

Conveyance Location: Main Channel

Low Beam Elev.: 1168.6

Rating Curve: MainCh-Proposed

Description: 274'x44' PPCB, Tee Piers, Integral Abutments (Des. No. 114)

Feature:

Type: Bridge

Maint. No.: 9972.65069 (pending)

FHWA No.: 700250

Conveyance Location: Main Channel

Obvert Elev.: 1165.5

Rating Curve: SOverflow-Proposed

Description: 12'x8'x84' RCB (Des. No. 214)

Feature:

Type: Low Roadway

Maint. No.: 9972.6-069

FHWA No.: 90700250

Conveyance Location: South Overflow

ETW Elev.: 1168.1

Rating Curve: SOverflow-Proposed

Description: 0.20 Mi. S. of main channel bridge

Riverine Infrastructure Database Data Collection - Data Compilation

Key points in the above files are as follows:

Site Summary - Site Development Status

'Complete' notes that dataset completed per the RIDB Guidelines. If not complete, note exceptions. For example, if all site features were not surveyed/identified, note "Only main channel bridge identified, culverts may be present at crossing".

Site Summary - Site Analysis File Locations

Note location of supporting analysis/survey. For RIDB datasets produced under project development supporting data may be stored with the project data.

Feature Summary - Status

'Existing' or 'Proposed'. For proposed note the changes from existing.

The Existing and Proposed feature summary should be all inclusive in that features common to both conditions should be included in both files. In the event that feature ID's are not available (Maint Number, etc.) use a common alpha code between the summary and mapping .dgn file.

B. Rating / Frequency Data

These documents are provided in comma delimited text (.csv). Example files are as follows:

| | |
|-----------|--------------------------|
| ;F,Q | ;Q,H, MainCh-Existing h5 |
| 2,2100 | 2100,1162.5 |
| 5,3500 | 3500,1164.8 |
| 10,4600 | 4600,1165.9 |
| 25,6200 | 6200,1167.2 |
| 50,7500 | 7500,1167.9 |
| 100,8900 | 8900,1168.4 |
| 200,10500 | 10500,1169.0 |
| 500,12800 | 12800,1169.7 |

C. Feature Mapping (.dgn)

Note separate files required for existing and proposed conditions. Example below includes main channel bridge, road overflow section, and overflow RCB culvert. Note: Background image shown for illustration only, not required.




Riverine Infrastructure Database Data Collection - Data Compilation

5. Flood Observation Datasets

If critical events are recorded during a flood at a riverine location a flood observation dataset should be developed.

An example dataset for a site where roadway overtopping was captured is as follows.

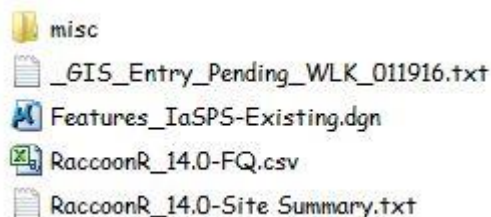

This dataset includes a partial site summary, frequency discharge data and a feature mapping file.

Note: The feature mapping file is only required if features are not already mapped into GIS. In this case the “_GIS_Entry . . . header will be provided by the database coordinator.

The ‘misc’ folder contains support data, and is not considered a required part of the dataset deliverable.

An example site summary is as follows:

```
Stream ID: RaccoonR
River Mile: 14.0
Description: I-35 Over Raccoon R, 0.1 Mi. N of IA 5
Drainage Area: 3480 Sq Mi (StreamStats)
Rating Location: RaccoonR_14.0

Hydrology Methodology: USGS SIR 2013-5086, Gage 05484650, Raccoon R at 63rd St.
Hydraulics Methodology: Flood Observation, Dec. 2015 Flood Event

Datum: NAVD88 IARTN(2011)

Site Development Status: Partial. Existing I-35 roadway impact only.
Site Analysis File Location: Sites - W:\Highway\Bridge\PrelimSection\Sites\7768.5LR035

Feature:
Type: Low Roadway      SB I-35 IA 5 Ramp
Maint. No.: 7768.3-L035
FHWA No.: 90041151
Conveyance Location: South Overflow
ETW Elev.: 829.1
Rating Curve: ETW Impact 48 kcfs
               Gage WDMI4 (Raccoon R U/S I-35) Stage 47.0+/-
Description: SB I-35 IA 5 Ramp, 0.20 Mi. S. of main channel bridge

Feature:
Type: Low Roadway      SB I-35
Maint. No.: 7768.3-L035
FHWA No.: 91041151
Conveyance Location: South Overflow
ETW Elev.: 830.8
Rating Curve: ETW Impact 58 kcfs
               Gage WDMI4 (Raccoon R U/S I-35) Stage 48.4+/-
Description: SB I-35, 0.2 Mi. S. of main channel bridge
```

Riverine Infrastructure Database Data Collection - Data Compilation

Note that the site and feature summaries are combined. Provide as much information as available, note if not available.

In the example shown above, in lieu of rating curve data the impact flowrate/gage height are shown.

The Site Analysis File Location field should be completed if support data or a more detailed description of events is available in another location.

The Site Development Status field should include a description of what is included, or is not included, relative to the RIDB Guidelines.

6. Dataset Repository / Tracking (DOT Function)

Datasets will be placed in the following location under a folder named with the Site Identification Code (Stream_RM).

W:\Highway\Bridge\PrelimSection\RiverineInfrastructureDB\sites\

Ex. ..\sites\UprlowaR_18.3

A empty text file will be placed in the folder with the name “_GIS_Entry_Pending_INIT_MMDDYY” (ex _GIS_Entry_Pending_WLK_011916.txt) to indicate that GIS entry of the mapped features are pending. Once the features are mapped, this file and the feature mapping .dgn file can be deleted.

For site features that are in the NBI (bridge) cross reference the PrelimSection\Sites folder to the RIDB dataset per the Guidelines Sect. 8.

Revisions:

1/25/16 – Initial Document