




PLAN

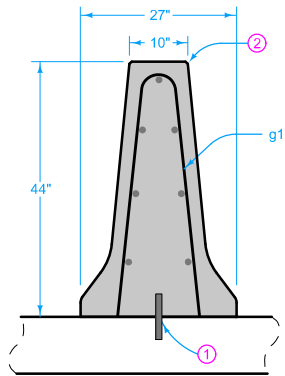


SECTION A-A

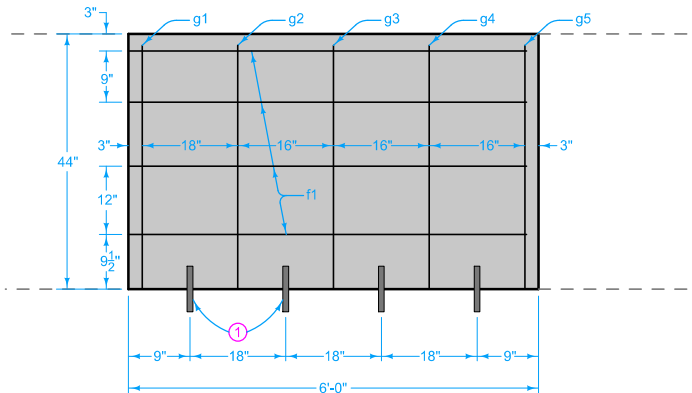


ELEVATION

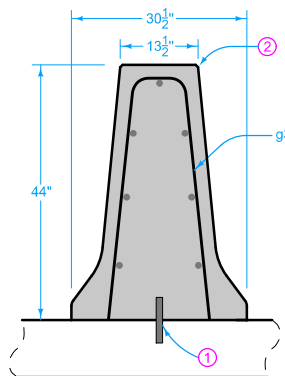


SECTION B-B

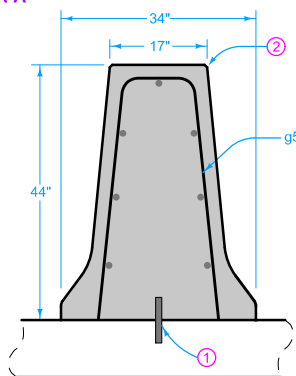

SECTION C-C

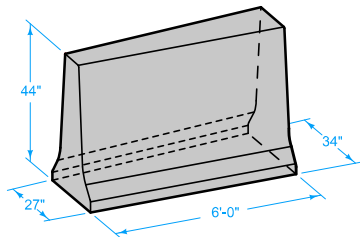

ISOMETRIC

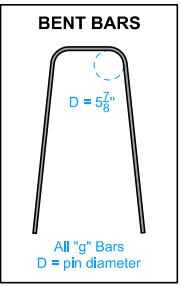

BENT BARS

REINFORCING BAR LIST Per Section (6'-0")				
Mark	Size	Number of Bars	Length	Weight (lbs.)
f1	5	7	69"	42
g1	5	1	87"	8
g2	5	1	89"	8
g3	5	1	91"	8
g4	5	1	92"	8
g5	5	1	94"	8

CONCRETE QUANTITIES  
Per Section  
1.3 cy

Use epoxy-coated grade 60 reinforcing bars. Provide 2 inches minimum cover. Anchor barrier reinforcement to prevent movement. Secure each section at the front, back, and at 3'-6" minimum intervals using a method approved by the Engineer.

- ① Use 1 inch diameter deformed dowel bars of sufficient length to ensure 6 inch minimum embedment in barrier and supporting surface. Install bars either in supporting surface when placed or in drilled holes using polymer grout complying with Materials I.M. 491.11 or hydraulic cement grout complying with Materials I.M. 491.13.
- ② Fillet all exposed corners with a 3/4 inch dressed and beveled strip.
- ③ Provide 18 inch overlap of reinforcing steel between sections.

Possible Contract Item:  
Concrete Barrier, BA-101

Possible Tabulation:  
108-18

 <b>STANDARD ROAD PLAN</b>	REVISION
	1   10-21-14
	BA-101
SHEET 1 of 1	

REVISIONS: Added CONCRETE QUANTITIES Per Section.  
*Brian Smith*  
APPROVED BY DESIGN METHODS ENGINEER

**44" CONCRETE MEDIAN BARRIER  
WIDTH TRANSITION**