
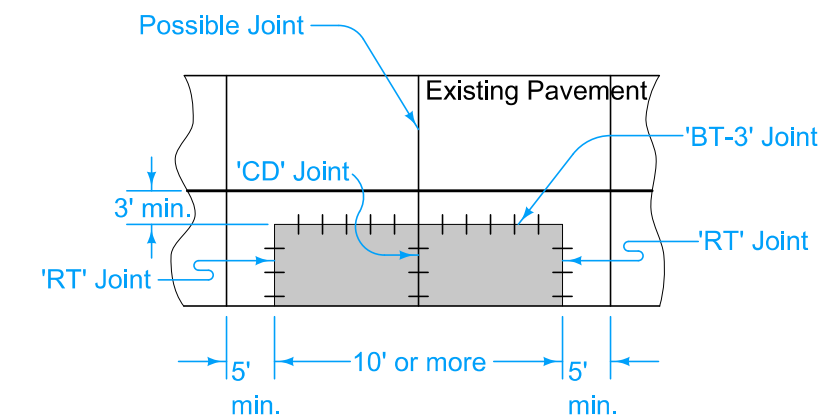
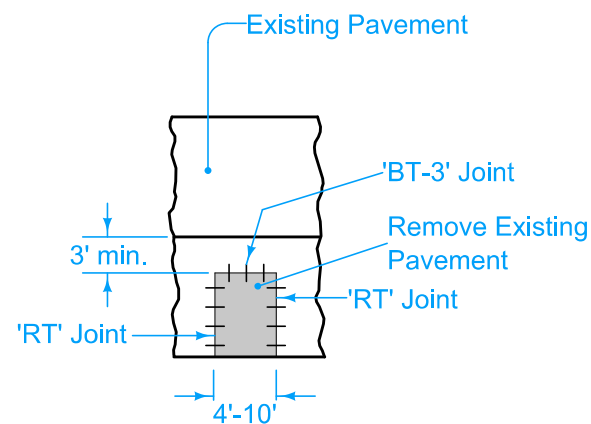
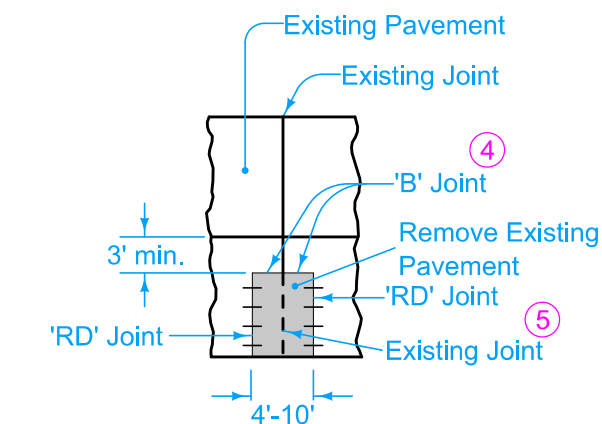
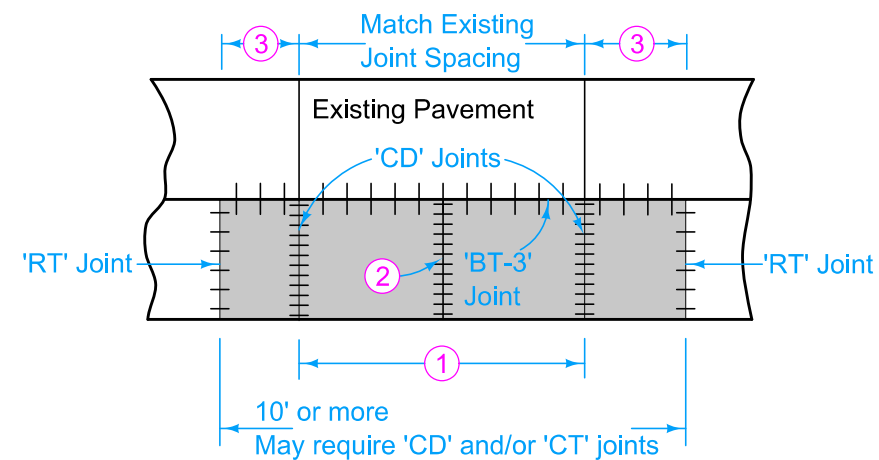
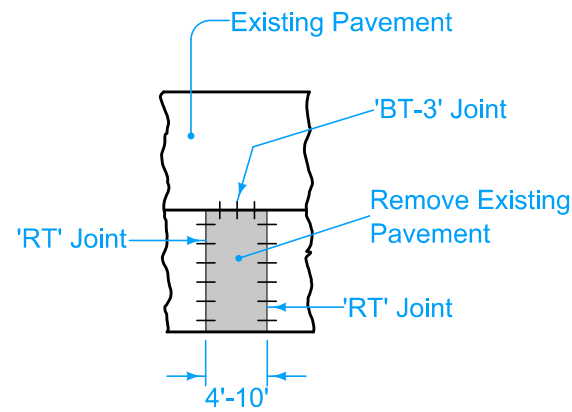


PARTIAL RAMP WIDTH PATCHES
(NO EXISTING LONGITUDINAL JOINT)

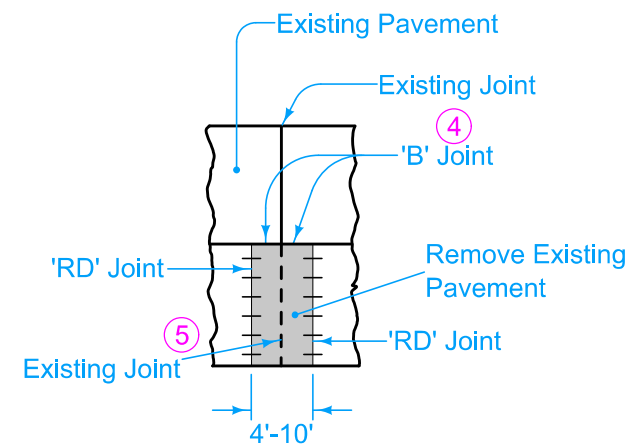

PARTIAL RAMP WIDTH PATCHES
(EXISTING LONGITUDINAL JOINT)

See PV-101 for joint and bar placement details.

Min. length for patches on interstate projects is 6 feet.

- ① Joint spacing 10 feet minimum, 17 feet maximum, 15 feet optimum.
- ② If there is no existing joint or crack in the adjacent pavement, place a 'CT' joint. If there is an existing joint or crack in the adjacent pavement, place a 'CD' joint at the same transverse location. Saw but do not seal 'CT' joints.
- ③ New 'CD' joint must be a minimum 5 feet from the patch end.
- ④ Do not saw or seal the joint. Place 1/2 inch preformed joint material between patch and concrete in adjacent lane.
- ⑤ Do not saw a new joint.

Possible Contract Items:

- CD Joint Assembly
- CT Joint
- Patches by Count (Repair)
- Patches, Full-Depth Finish, by Area
- Patches, Full-Depth Finish, by Count
- Patches, Full-Depth Finish, by Area (50 feet in length or greater)
- Patches, Full-Depth Repair




Possible Tabulation:
102-6C

	REVISION	
	3	10-17-23
STANDARD ROAD PLAN		PR-105
		SHEET 1 of 3




REVISIONS: Changed length of patch from 6'-10" to 4'-10" to match specs.

Shawn Miller
APPROVED BY DESIGN METHODS ENGINEER

**FULL DEPTH RAMP PCC PATCH
WITH DOWELS**

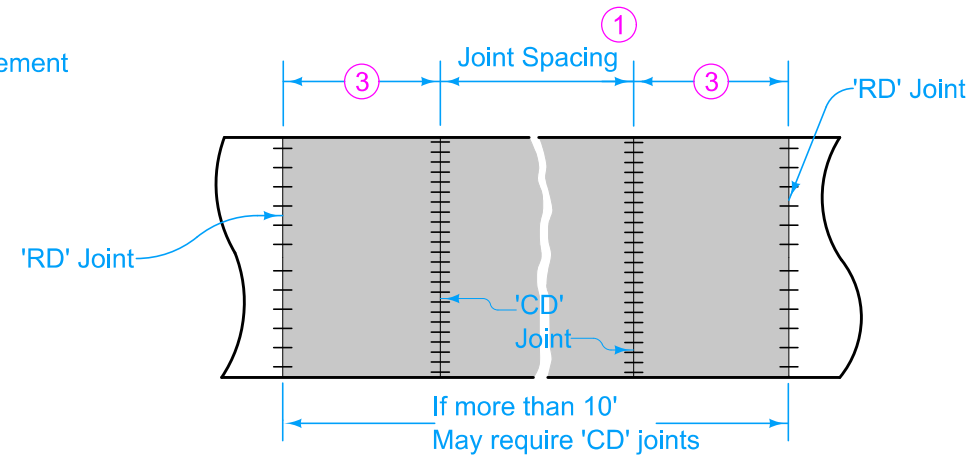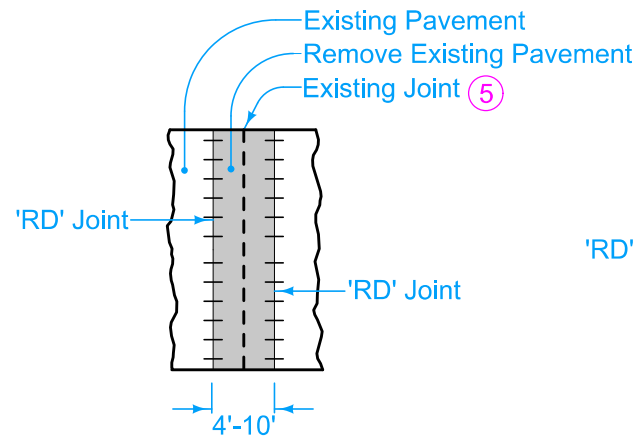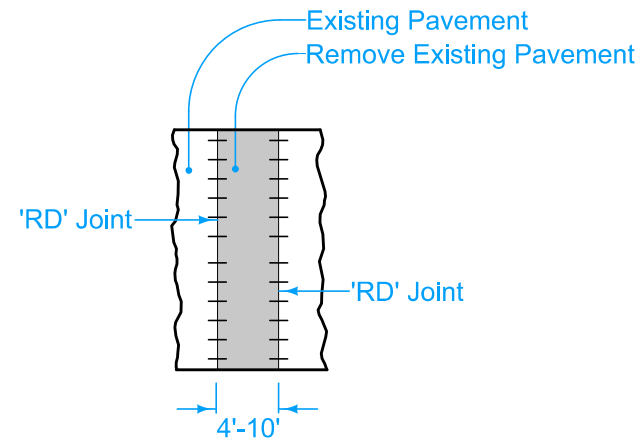

FULL RAMP WIDTH PATCHES
(NO EXISTING LONGITUDINAL JOINT)

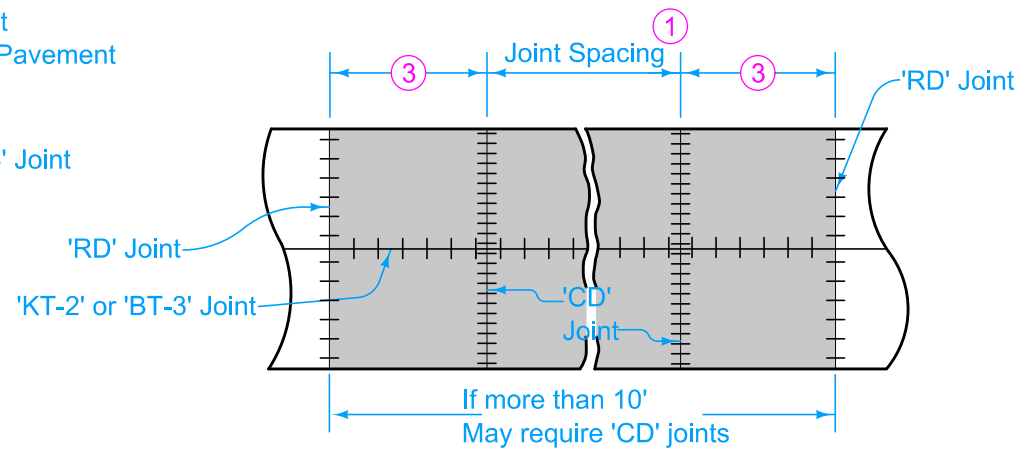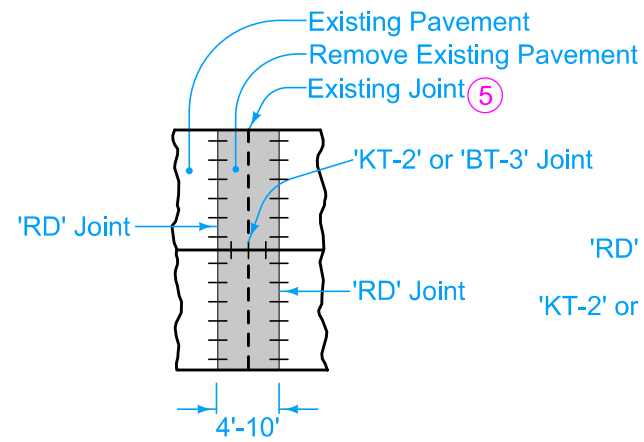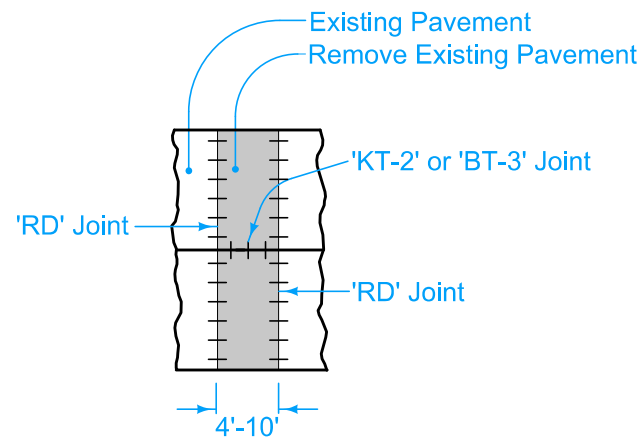

FULL RAMP WIDTH PATCHES
(EXISTING LONGITUDINAL JOINT)


- ① Joint spacing 10 feet minimum, 20 feet maximum, 15 feet optimum.
- ③ New 'CD' joint must be a minimum 5 feet from the patch end.
- ⑤ Do not saw a new joint.

 STANDARD ROAD PLAN	REVISION	
	3	10-17-23
PR-105		SHEET 2 of 3


REVISIONS: Changed length of patch from 6'-10" to 4'-10" to match specs.

Shawn Miller
APPROVED BY DESIGN METHODS ENGINEER

**FULL DEPTH RAMP PCC PATCH
WITH DOWELS**

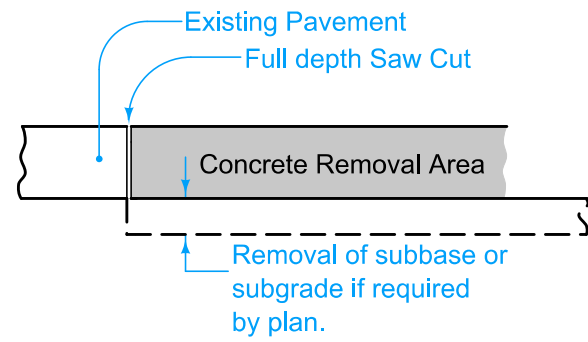


PAVEMENT REMOVAL DETAILS

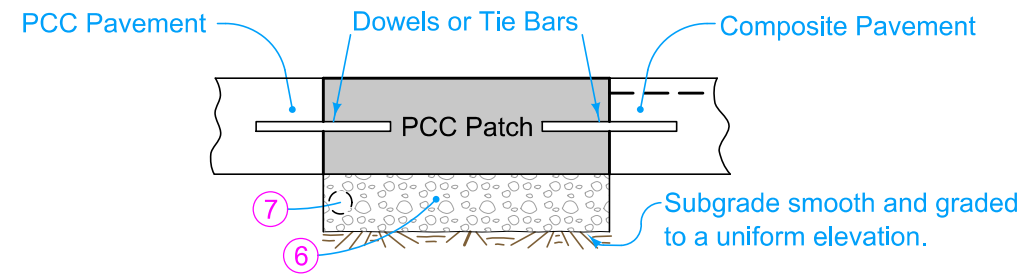

LONGITUDINAL SECTION THRU PATCH

- ⑥ Possible Subbase Patch, see PR-140.
- ⑦ If longitudinal subdrain (shoulder) is not to be placed or if it is not present on side of roadway to be patched, then place drain per PR-140.

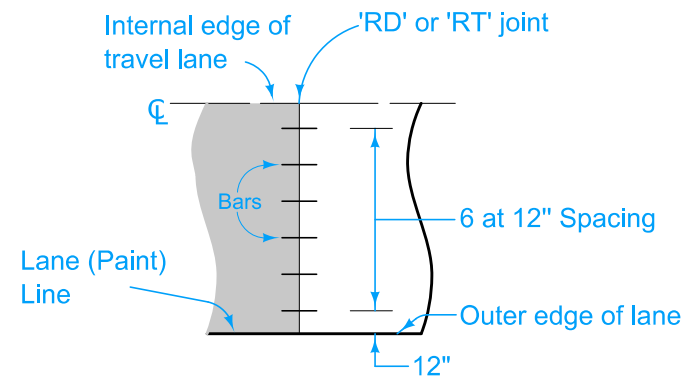

DETAIL FOR 'RT' OR 'RD'
JOINT BAR SPACING
TYPICAL HALF PLAN

BAR SIZE TABLE			
Existing PCC Pavement Thickness	Less than 8"	8" to 10"	More than 10"
DOWEL SIZE	3/4"	1 1/4"	1 1/2"
TIE BAR SIZE	#6	#10	#11

	REVISION	
	3	10-17-23
STANDARD ROAD PLAN		PR-105
		SHEET 3 of 3

REVISIONS: Changed length of patch from 6'-10' to 4'-10' to match specs.

Stuart Miller
APPROVED BY DESIGN METHODS ENGINEER

**FULL DEPTH RAMP PCC PATCH
WITH DOWELS**