



**MODIFIED SUBBASE AND SUBDRAIN**  
IF LONGITUDINAL SUBDRAIN IS PRESENT OR IS TO BE PLACED

- ① 6 inches Modified Subbase (no RAP) if required by plan. When placed, extend Modified Subbase (no RAP) over longitudinal subdrain, if present.
- ② If longitudinal subdrain (shoulder) is not to be placed or if it is not present on side of roadway to be patched, then place Patch Subdrain at low end(s) of patch.

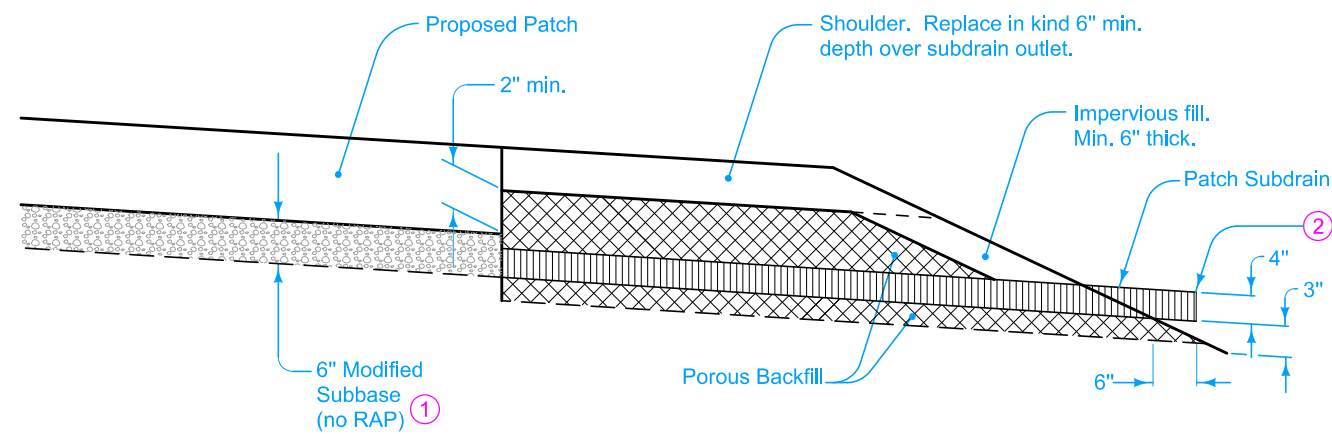

**MODIFIED SUBBASE AND SUBDRAIN**  
WITHOUT LONGITUDINAL SUBDRAIN

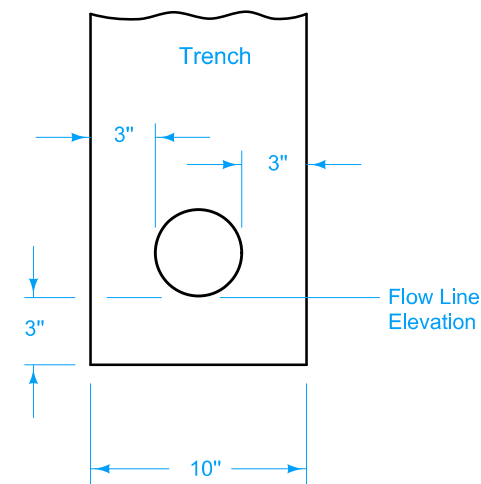

**DRAIN PLACEMENT**

Possible Contract Items:  
Subbase (Patches)  
Patch Subdrain

Possible Tabulation:  
102-6C

 <b>STANDARD ROAD PLAN</b>	REVISION	
	1	04-21-15
	<b>PR-140</b>	
SHEET 1 of 1		

REVISIONS: Removed references to rodent guards.

*Stuart Miller*  
APPROVED BY DESIGN METHODS ENGINEER

**SUBBASE PATCHES**