


'P' and 'T' are specified by the individual project plans. Dimensions may vary for superelevated curves or at locations specifically designated by the Engineer.

Handle excavated asphalt materials as detailed elsewhere in the project plans.


Construct special shaping of widening units through bridge approach sections as directed by the Engineer.

Excavation in excess of that indicated is incidental to other work on the project.

Place Special Backfill only at locations where specifically required by the Engineer. This work will be paid for as "Extra Work" as per Article 1109.03 of the Standard Specifications.

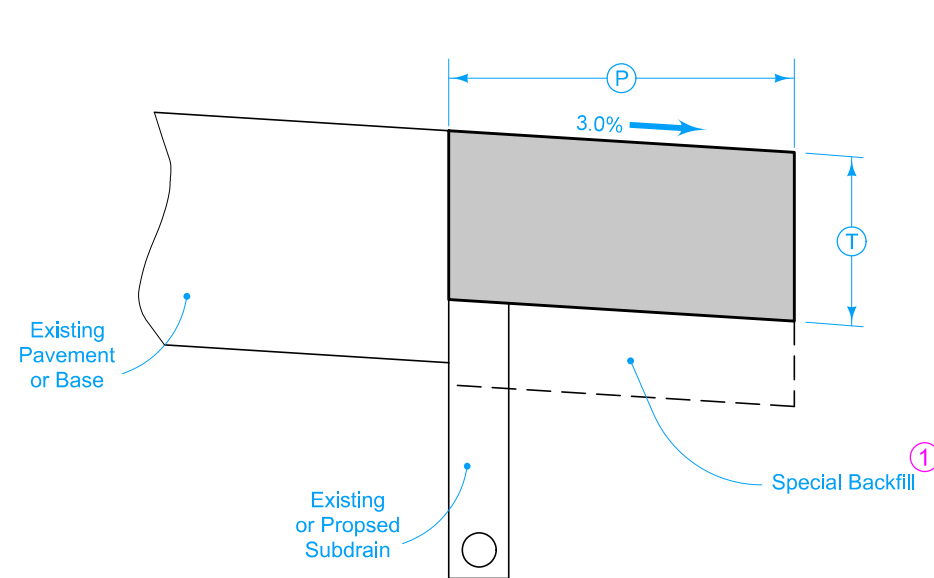

Hot Mix Asphalt
Widening on Existing
Pavement Without Curb

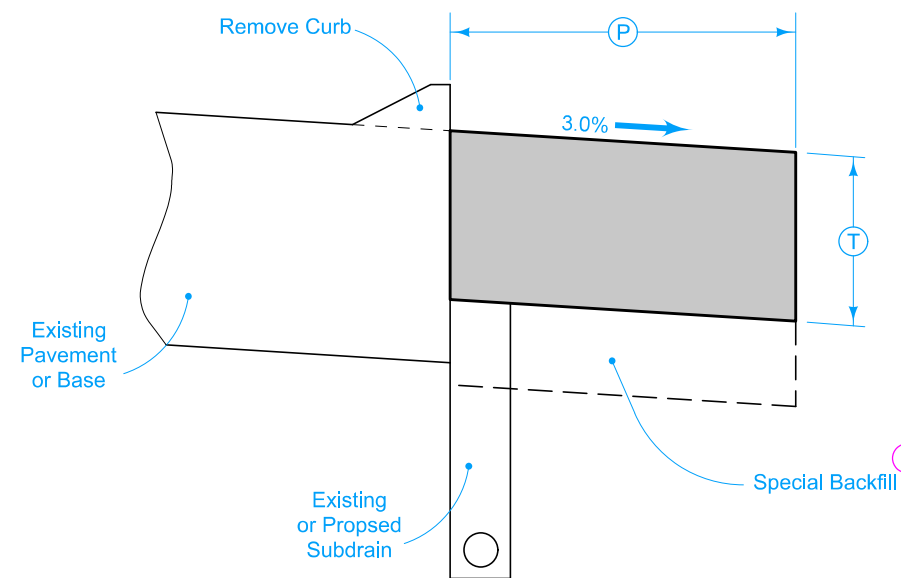



Hot Mix Asphalt
Widening on Existing
Pavement With Curb

① 6 inches of Special Backfill required when widening unit is part of the proposed traffic lane or when noted in project plans.

- Possible Contract Items:
- Base Widening, Hot Mix Asphalt Mixture
 - Removal of Curb
 - Removal of Flumes
 - Excavation, Class 13, For Widening
 - Special Backfill
 - Asphalt Binder

- Possible Tabulations:
- 106-5
 - 110-4
 - 110-3

 STANDARD ROAD PLAN	REVISION	
	1	04-21-20
PV-203		SHEET 1 of 1
REVISIONS: New logo.		
 <small>APPROVED BY DESIGN METHODS ENGINEER</small>		
HMA BASE WIDENING		