


Acceptable materials and construction method for Pedestrian Channelizer will be defined in the contract documents. When Temporary Barrier Rail is specified as the Pedestrian Channelizer, [Section 2528](#) of the Standard Specifications applies. For other types of Pedestrian Channelizers, the length of Pedestrian Channelizer installed will be measured in feet. Payment will be at the contract price per linear foot.

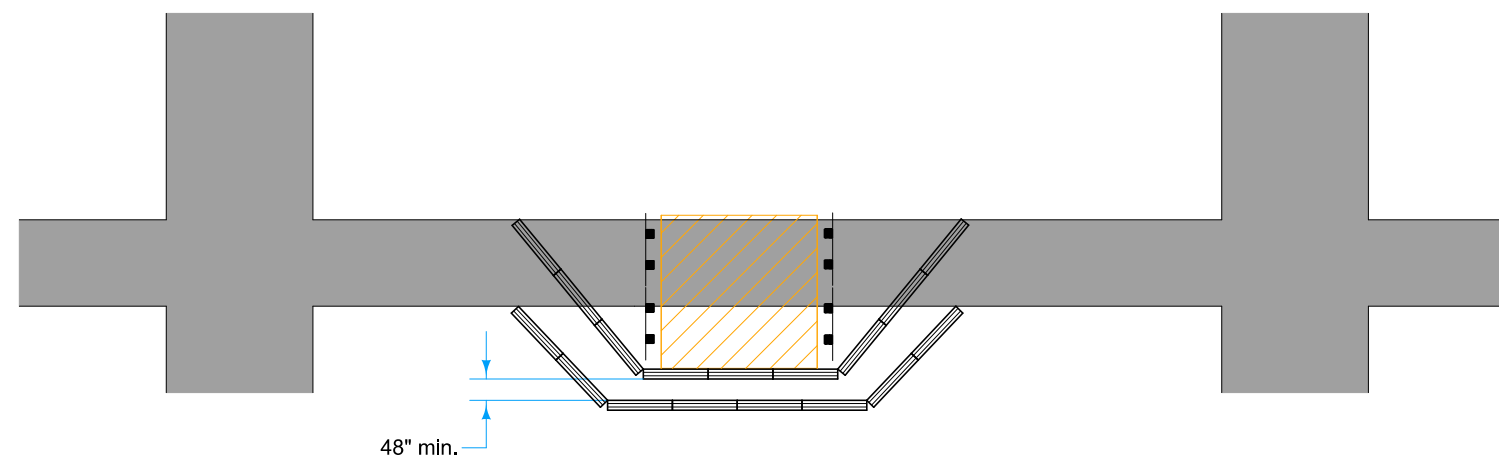

Possible Contract Items:
 Pedestrian Channelizer
 Temporary Barrier Rail
 Maintenance of Pedestrian Traffic

Possible Tabulation:
[113-3](#)

LEGEND	
	Sidewalk
	Direction of Traffic
	Work Area
	Type III Barricade
	Pedestrian Channelizer

	REVISION	
	1	10-15-19
STANDARD ROAD PLAN		TC-602
REVISIONS: New logo.		SHEET 1 of 1

Steve Miller
 APPROVED BY DESIGN METHODS ENGINEER

SIDEWALK DIVERSION