



SECTION A-A

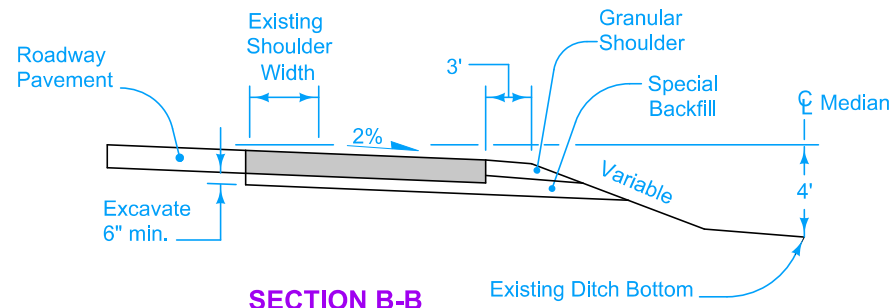


SECTION B-B

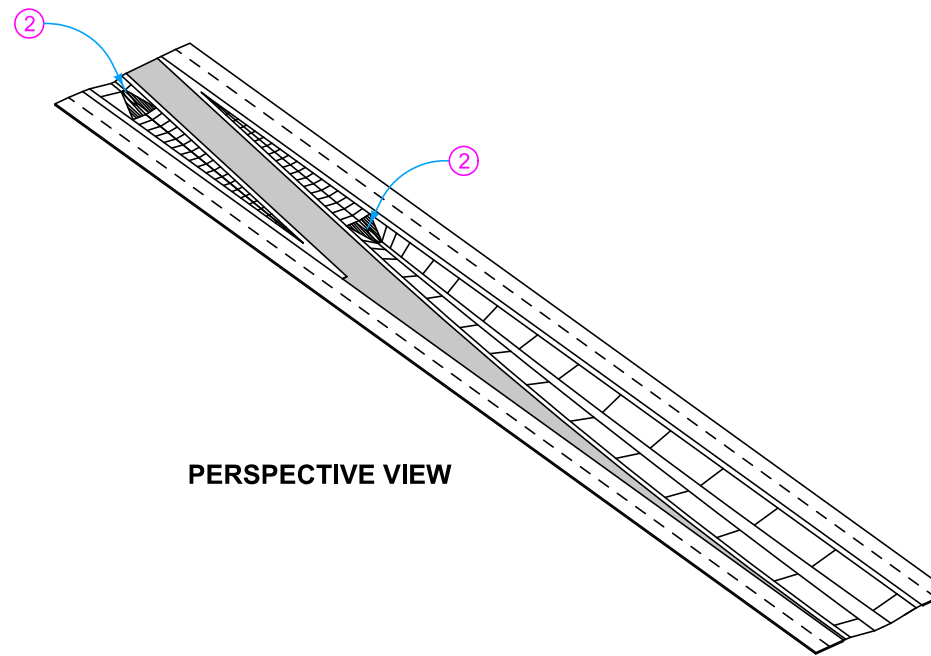


PERSPECTIVE VIEW


- Detour Pavement options: 9" PCC or 12" HMA
 For joint details, see PV-101.
- ① Median crossover is symmetrical about centerline.
 - ② Median pipe for crossover. See DR-504.
 - ③ For PCC Detour Pavement, match existing roadway joints. 'CD' joints are required.
 - ④ 'KT-2' or 'L-2' joint if mainline pavement is new construction. Bend bars out. 'BT-3' joint if mainline pavement is existing. 'B' joint if Detour Pavement is HMA.

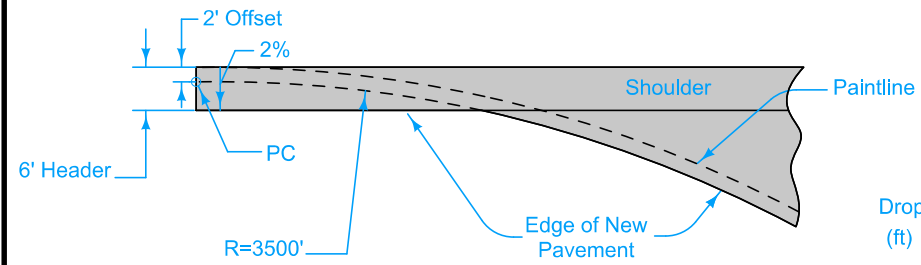

DETAIL 'A'

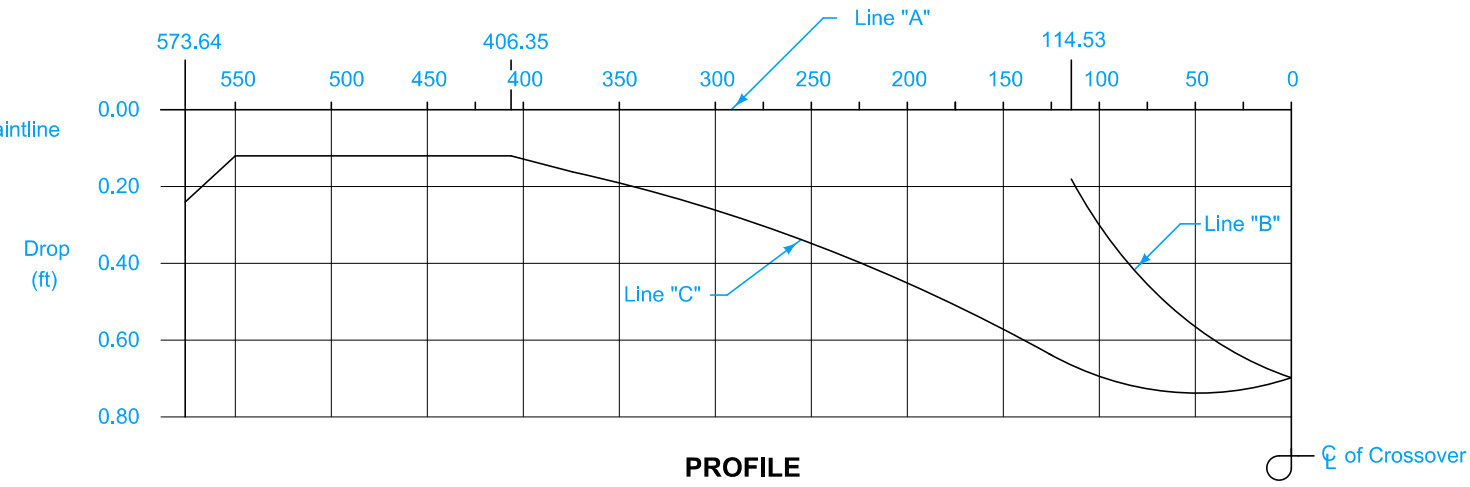

PROFILE

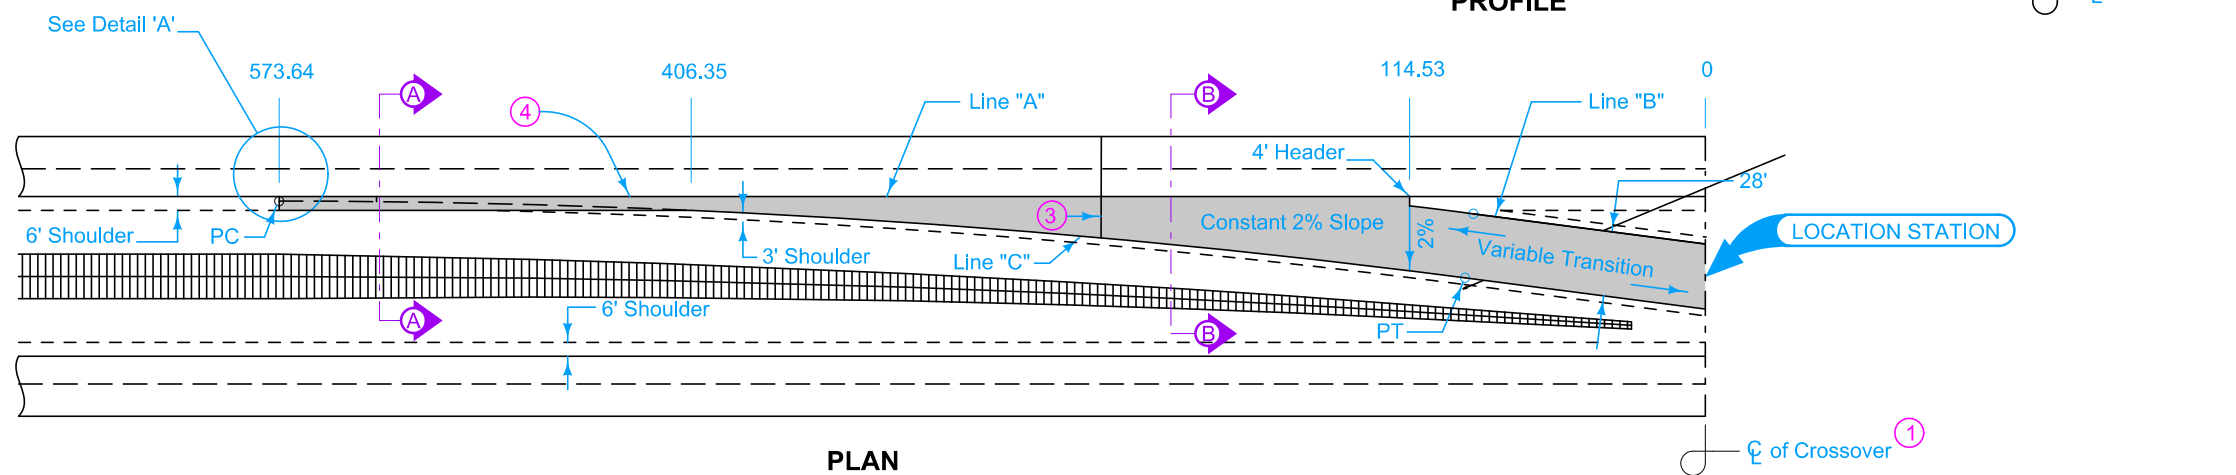

PLAN

DESIGN QUANTITY TABLE		
Detour Pavement Sq. Yds.	Special Backfill Tons	Granular Shoulder Tons
2050	880	*235

*Quantity based on 8" shoulder depth.



- Possible Contract Items:
- Detour Pavement
 - Embankment In Place
 - Excavation, Class 10, Roadway and Borrow
 - Excavation, Class 13, Roadway and Borrow
 - Granular Shoulder, Type A
 - Removal of Pavement
 - Special Backfill

Possible Tabulation:
112-8

TABLE OF OFFSETS AND DROPS																							
Distance (Feet)	573.64	550	500	450	406.35	400	375	350	325	300	275	250	225	200	175	150	125	114.53	100	75	50	25	0
Offset A to C (Feet)	6.00	6.00	6.00	6.00	6.00	6.31	7.64	9.15	10.84	12.71	14.76	16.99	19.41	22.00	24.78	27.73	30.87	32.24	34.20	37.69	41.21	44.73	48.26
Drop A to C (Feet)	0.24	0.19	0.12	0.12	0.12	0.13	0.15	0.18	0.22	0.25	0.30	0.34	0.40	0.44	0.50	0.55	0.62	0.64	0.70	0.73	0.74	0.73	0.70
Drop A to B (Feet)																		0.08	0.30	0.45	0.56	0.64	0.70

STANDARD ROAD PLAN

REVISION	
4	04-21-20

PV-508

SHEET 1 of 1

REVISIONS: New logo and modified circle note 2.

Shawn Miller
APPROVED BY DESIGN METHODS ENGINEER

MEDIAN CROSSOVER
(68.24' MEDIAN)
28' WIDE 2 LANE