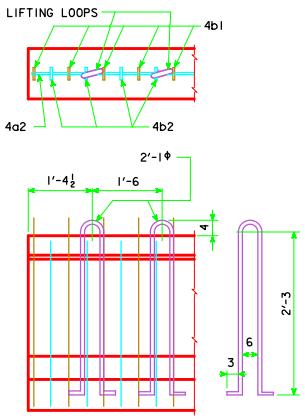

LIFTING LOOP DETAIL

ALTERNATE TYPES MAY BE SUBSTITUTED WITH THE APPROVAL OF THE ENGINEER. LIFTING LOOPS ARE TO BE STRUCTURAL GRADE.

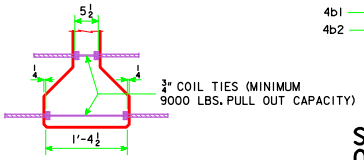

COIL TIE DETAIL

NUMBER AND EXACT LOCATION OF COIL TIES TO BE AS DETAILED ON SPECIFIC BRIDGE DESIGN.



2 TOP DEFLECTED OR STRAIGHT STRANDS ARE TO BE CUT WITH 1'-0 PROJECTIONS AND SHOP BENT UP OR DOWN AS SHOWN (BEND TOP AND BOTTOM ROWS). THE REMAINING TOP STRANDS ARE TO BE CUT WITH 0'-3 PROJECTIONS. FOUR BOTTOM STRANDS ARE TO BE CUT WITH 1'-0 PROJECTIONS AND SHOP BENT AS SHOWN. THE REMAINING BOTTOM STRANDS SHALL BE CUT OFF REASONABLY FLUSH WITH THE CONCRETE.



TYPICAL AT BOTH BEAM ENDS

STRAND PROJECTION AT BEAM ENDS WHEN EMBEDDED IN CONCRETE END DIAPHRAGMS

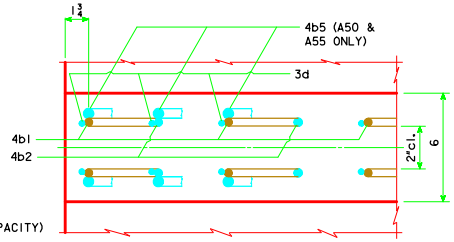

SECTION A-A SHOWING PLACEMENT OF STIRRUPS NEAR END OF BEAM

A BEAM DATA

BEAM	SPAN LENGTH ℄-℄ BEARING	OVERALL BEAM LENGTH (L)	STRAND SIZE DIA. (Inches)	NO. OF STRANDS STRAIGHT	NO. OF STRANDS DEFLECTED	TOTAL INITIAL PRESTRESS ③ KIPS	HOLD DOWN FORCE-KIPS	CAMBER (In.) AT RELEASE	CAMBER (In.) AFTER LOSSES	DEFLECTION (In.) Δ_D IMMEDIATE ① (ELASTIC) Δ_I STEEL DIAPH.	DEFLECTION (In.) Δ_D TIME ② (PLASTIC) Δ_T STEEL DIAPH.	WEIGHT (TONS)	CONCRETE (C. Y.)	REINFORCING STEEL-(lb)
A46	46'-8	47'-8	0.60	8	2	426	8.5	0.76	1.35	0.44	0.11	7.7	3.82	488
A55	55'-0	56'-0	0.60	10	3	553	10.8	1.29	2.30	0.82	0.21	9.1	4.49	547

① DEFLECTIONS AT MID-SPAN DUE TO WEIGHT OF SLAB AND DIAPHRAGM.

② DEFLECTIONS DUE TO THE COMBINED EFFECT OF CREEP DUE TO WEIGHT OF SLAB AND SHRINKAGE OF SLAB.

TOTAL BEAM DEFLECTIONS AT ℄ OF SPAN, Δ_D, DUE TO WEIGHT OF SLAB AND DIAPHRAGMS FOR DETAILING PURPOSE:
(A) $\Delta_D = \Delta_I + \Delta_T$ FOR SIMPLE SPAN.

③ TOTAL INITIAL PRESTRESS IS BASED ON 72.6% f's, f's = 270 ksi AND As = 0.217 sq. in.

DESIGN STRESSES:

DESIGN STRESSES FOR THE FOLLOWING MATERIALS ARE TO BE IN ACCORDANCE WITH A.A.S.H.T.O. LRFD SPECIFICATIONS FOR HIGHWAY BRIDGES, SERIES OF 2007:
REINFORCING STEEL IN ACCORDANCE WITH SECTION 5, GRADE 60.
CONCRETE IN ACCORDANCE WITH SECTION 5.
MINIMUM CONCRETE f'c (AT 28 DAYS) SHALL BE 7,000 psi.
MINIMUM f'ci AT RELEASE SHALL BE 6,000 psi.
PRESTRESSING STEEL IN ACCORDANCE WITH SECTION 5, f's = 270,000 psi.

SPECIFICATIONS:

CONSTRUCTION: STANDARD SPECIFICATIONS OF THE IOWA DEPARTMENT OF TRANSPORTATION, CURRENT SERIES, WITH CURRENT APPLICABLE SPECIAL PROVISIONS AND SUPPLEMENTAL SPECIFICATIONS.
DESIGN: A.A.S.H.T.O. LRFD, SERIES OF 2007, WITH MINOR MODIFICATIONS.

BEAM NOTES:

THESE BEAMS ARE DESIGNED FOR AASHTO HL-93 LIVE LOADS AS WITH AN ALLOWANCE OF 20 lb. PER SQUARE FOOT OF ROADWAY FOR FUTURE WEARING SURFACE.

ALL PPC BEAMS SHALL USE HIGH PERFORMANCE CONCRETE (HPC) IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS.

HOLD DOWN POINTS FOR DEFLECTED STRANDS MAY BE MOVED TOWARD ENDS OF BEAM A DISTANCE OF 0.05 L MAXIMUM AT PRODUCER'S OPTION.

ALL PRESTRESSING STRANDS SHALL CONFORM TO ASTM A416 GRADE 270 LOW RELAXATION STRANDS.

TOPS OF BEAMS ARE TO BE STRUCK OFF LEVEL AND FINISHED AS PER MATERIALS IM570.

BEARINGS SHALL BE AS DETAILED ON OTHER DESIGN SHEETS.

BEAMS SHALL BE AT LEAST 28 DAYS OLD BEFORE THE SLAB IS PLACED EXCEPT AS OTHERWISE APPROVED BY THE ENGINEER.

THE PORTIONS OF THE PRESTRESS BEAMS THAT ARE TO BE EMBEDDED IN THE ABUTMENT SHALL BE ROUGHENED FOR A DISTANCE OF 10" FROM THE BEAM END BY SANDBLASTING OR OTHER APPROVED METHODS TO PROVIDE SUITABLE BOND BETWEEN THE BEAM AND THE DIAPHRAGM IN ACCORDANCE WITH ARTICLE 2403.03, I, OF THE STANDARD SPECIFICATIONS.

ALL BEAMS ARE TO BE INCREASED IN LENGTH TO COMPENSATE FOR ELASTIC SHORTENING, CREEP AND SHRINKAGE.

HOLES MUST BE CAST IN THE WEB TO ACCOMMODATE THE STEEL DIAPHRAGM ATTACHMENTS AS DETAILED ON THE STEEL DIAPHRAGM DETAIL SHEET.

0.6" DIAMETER STRANDS STRESSED TO NOT MORE THAN 5,000 LBS. EACH MAY BE USED IN LIEU OF THE a BARS WHICH RUN THE FULL LENGTH OF THE BEAM IN THE TOP FLANGE.

REINFORCING BAR LIST

	BEAM / BAR	SHAPE	A46 SPAN 46'-8 NO.	A46 LENGTH	A55 SPAN 55'-0 NO.	A55 LENGTH
	5a1		4	24'-11	4	29'-1
	4a2		2	3'-3	2	3'-3
ΔΔ	4b1		44	6'-8	50	6'-8
	4b2		12	5'-0	8	5'-0
	4b5		—	—	12	2'-9
	3c1		44	1'-3	50	1'-3
**	3d		112	2'-8	116	2'-8
	3e		20	1'-6	18	1'-6



ALL DIMENSIONS ARE OUT TO OUT. RADIUS TO ℄ BAR. D = PIN DIAMETER.

ΔΔ 4b1 BARS TO BE EPOXY COATED.

** WHERE DEFLECTING STRANDS INTERFERE WITH PLACEMENT, SOME IN-PLACE BENDING MAY BE NECESSARY.

LATEST REVISION DATE

APPROVED BY BRIDGE ENGINEER

Iowa Department of Transportation
Highway Division

STANDARD DESIGN - 30' ROADWAY, SINGLE SPAN BRIDGE

PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES

APRIL, 2012

A BEAM DETAILS

H30SI-21-12