


LAPPING PROCEDURE

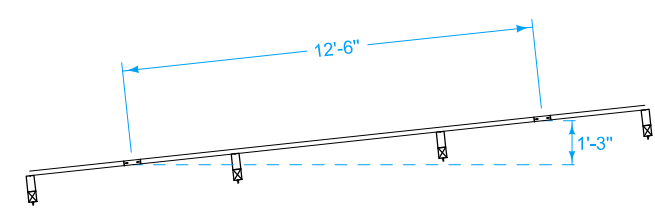

VARIABLE FLARE

Install delineators and object markers according to SI-211.
 For grading requirements, see EW-301.
 For general guardrail details, see BA-200.

- ① See BA-201.
- ② See BA-202 for connections to concrete barriers and bridge rail end sections.
- ③ See LS-625.
- ④ See LS-626.

Possible Contract Items:
 Steel Beam Guardrail
 Steel Beam Guardrail Barrier Transition Section, BA-201
 Steel Beam Guardrail End Anchor, Bolted
 Steel Beam Guardrail Flared End Terminal, LS-626
 Steel Beam Guardrail Tangent End Terminal, LS-625

Possible Tabulation:
 108-8A

	REVISION	
	2	10-19-21
STANDARD ROAD PLAN	LS-630	
SHEET 1 of 1		
REVISIONS: Removed circle note 5.		
<i>Shant Niles</i> APPROVED BY DESIGN METHODS ENGINEER		
STEEL BEAM GUARDRAIL INSTALLATION AT CONCRETE BARRIER OR BRIDGE RAIL END SECTION (NCHRP 350 TL-3)		