7135
10-15-13

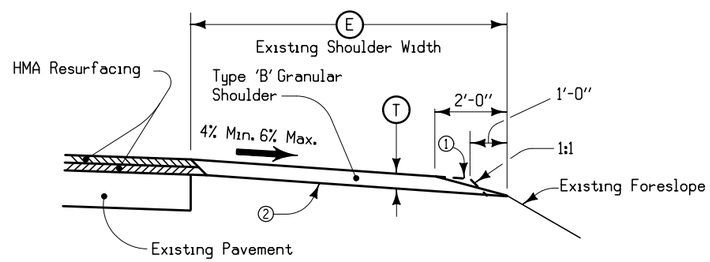

1. Place and compact material to the dashed lines; then blade and shape to foreslope that portion above the solid line in the outer 2' and roll with loaded truck tire.
2. Existing shoulder surface to be shaped to a uniform cross slope prior to placing granular shoulder material. Shape to ensure the thickness of the granular shoulder material is not less than the thickness of the resurfacing.

LOCATION				T	E
ROAD IDENTIFICATION	STATION TO STATION		SIDE	Inches	Feet

TYPICAL SECTION FOR TYPE 'B' GRANULAR SHOULDER

ADJACENT TO HOT MIX ASPHALT RESURFACING