



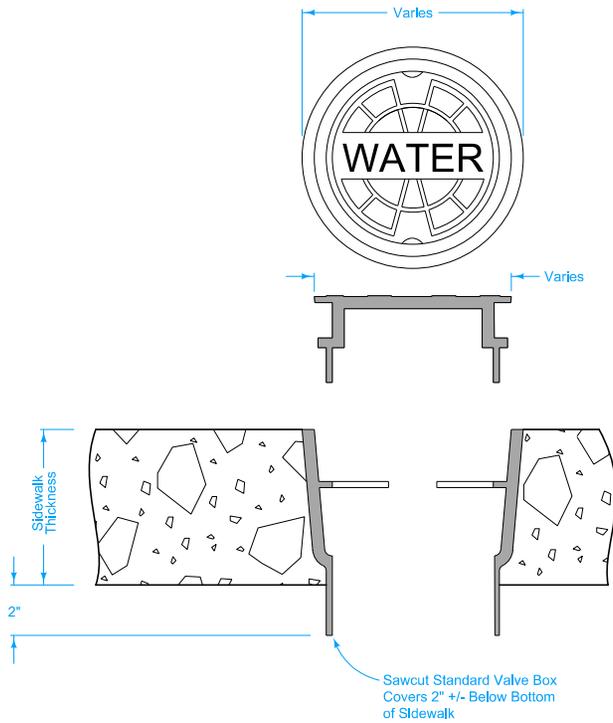


For a double curb stop cover, use the same cover shown.

The elevation of the shut-off cover may need to be staggered in order to pass heads through the lower flange or supporting seat.



CASE 1

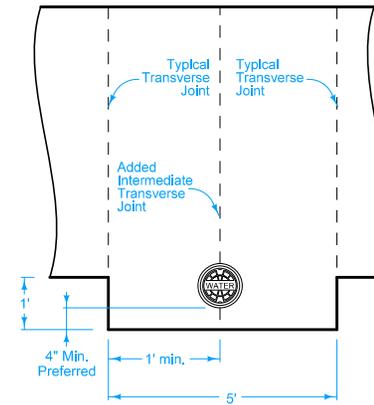

CASE 2

Possible Contract Item:  
Water Service Curb Stop, Cover Only

|                           |          |              |
|---------------------------|----------|--------------|
| <b>IOWA DOT</b>           | REVISION |              |
|                           | NEW      | 10-15-19     |
| <b>ROAD DESIGN DETAIL</b> |          | <b>560-8</b> |
| REVISIONS: New.           |          | SHEET 1 of 1 |

**WATER SERVICE  
CURB STOP COVER  
LOCATED IN SIDEWALK**