DESIGNER INFO

Obtain the Engineer's approval for location of stabilized entrances prior to constructing.

1. Place engineering fabric prior to placing aggregate. Use fabric for Embankment Erosion Control complying with Section 4196 of the Standard Specifications.
2. Use aggregate meeting Gradation No. 13a of Section 4109 of the Standard Specificaitons.
3. Depth may need to be increased depending on the weight of contractor vehicles and equipment.

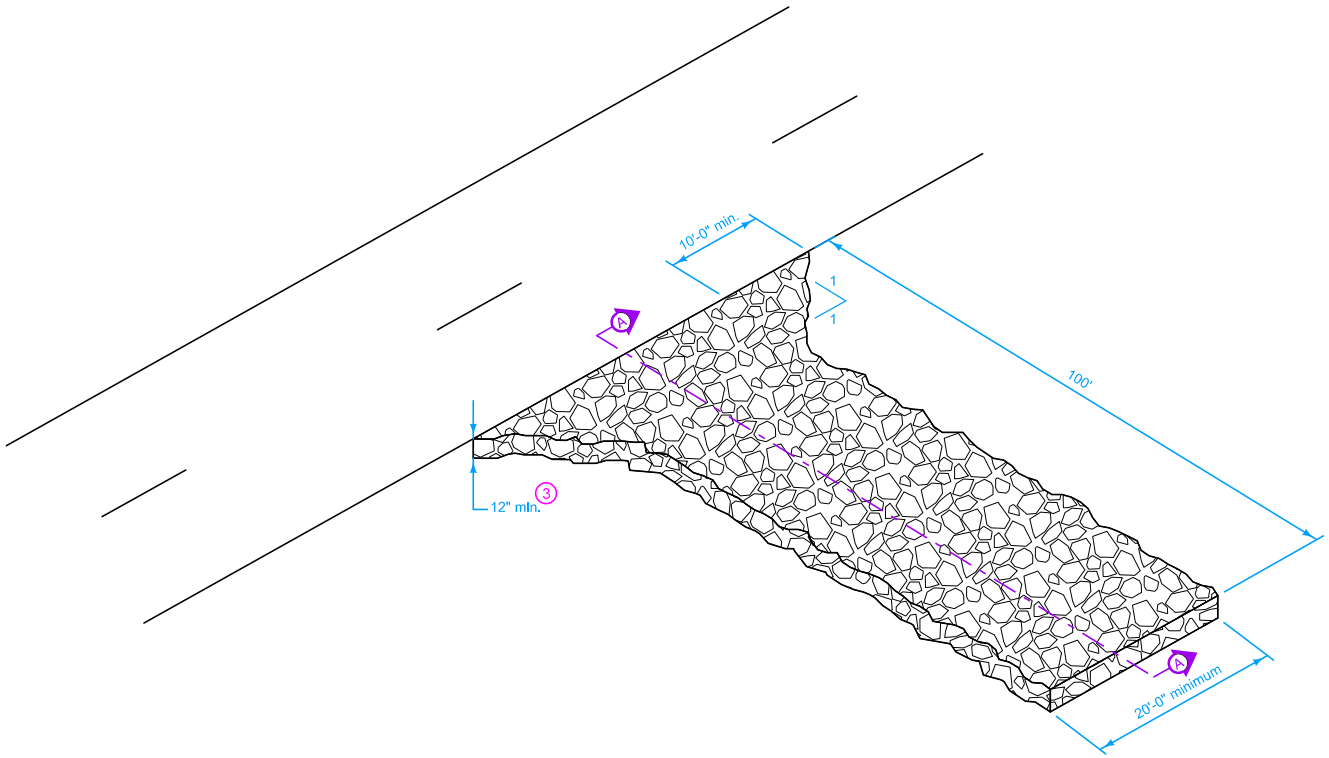

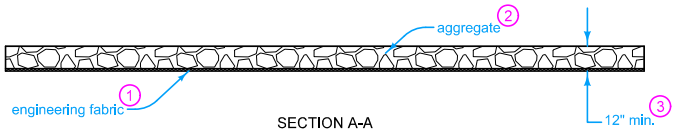

SECTION A-A

IOWA DOT

STANDARD ROAD PLAN

REVISION	
4	10-19-21

EC-303

SHEET 1 of 1

REVISIONS: Defined length to be 100', to be consistant with spec change.

APPROVED BY DESIGN METHODS ENGINEER

STABLIZED CONSTRUCTION ENTRANCE