


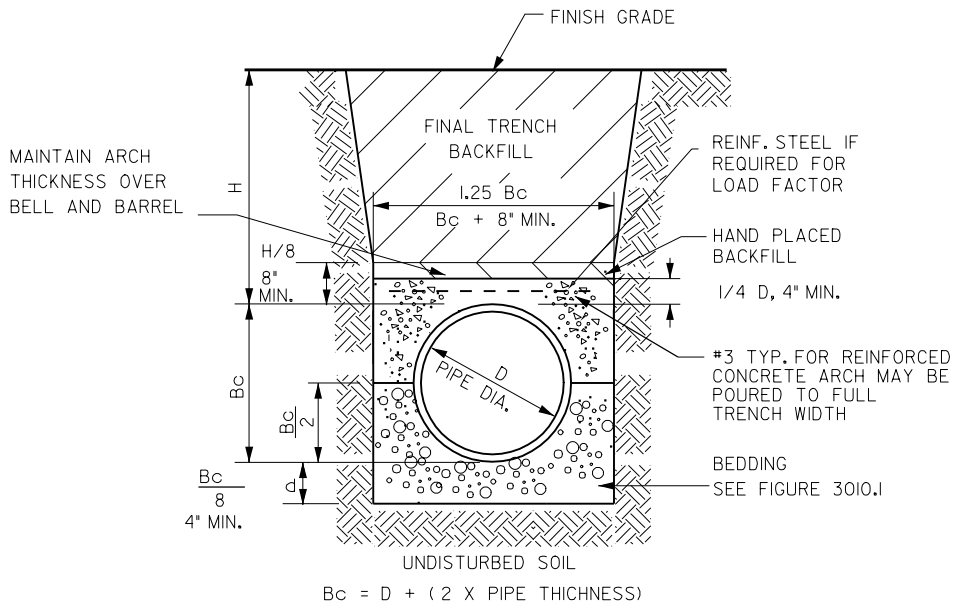

LOAD FACTOR:	
4.8	AREA TRANSVERSE STEEL = $0.01 \times$ AREA OF CONCRETE AT CROWN; MAX. SPACING = 12"
3.4	AREA TRANSVERSE STEEL = $0.004 \times$ AREA OF CONCRETE ARCH AT CROWN; MAX. SPACING OF REINFORCING STEEL = 12"
2.8	NON-REINFORCED P.C. CONCRETE ARCH.

REV.	DATE	BY	P.C. CONCRETE ARCH	FIGURE: 3010.3
DATE: 01-01-98				SHEET 1 OF 1