


HALF SECTION
SECTION A-A

NOTES:

- (A) RING & COVER - SEE SPECIFICATIONS.
- (B) BACKFILL TO SPRINGLINE OF PIPE WITH BEDDING MATERIAL.
- (C) STANDARD MANHOLE SECTIONS.
- (D) 12" MIN. THICKNESS OF GRANULAR BEDDING MATERIALS.
- (E) UNDISTURBED SOIL.
- (F) 4" (MIN.) VOID BETWEEN PIPE AND MANHOLE SECTION. KEEP FREE OF FOREIGN MATERIAL.
- (G) DO NOT REST MANHOLE SECTION ON SEWER PIPE.

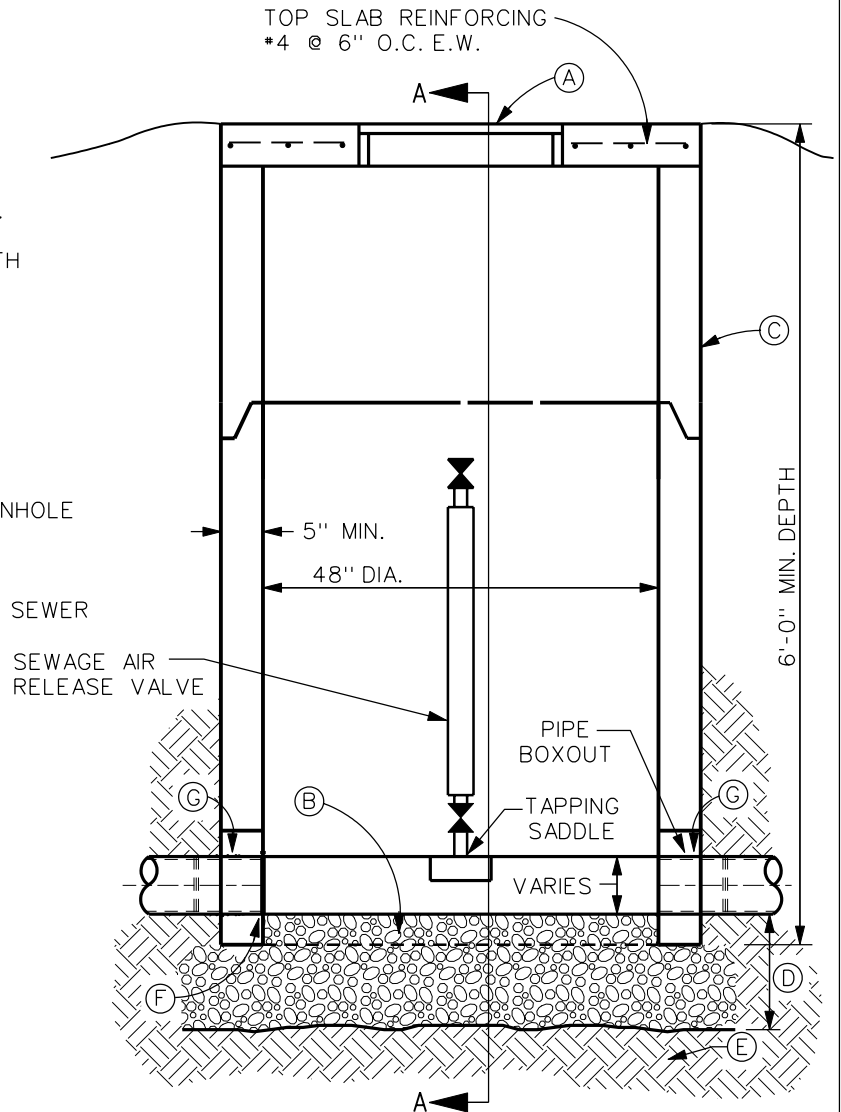

1	10/18/05		SEWAGE AIR RELEASE VALVE PIT	FIGURE: 4010.3
REV.	DATE	BY		SHEET 1 OF 1
DATE: 01-01-98				