



URBAN STANDARD SPECIFICATIONS for PUBLIC IMPROVEMENT MANUAL

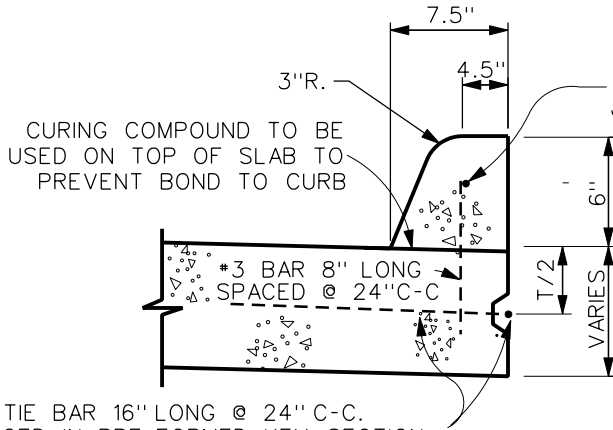


*#4 TIE BAR 16" LONG @ 24" C-C.
PLACED IN PRE-FORMED KEY SECTION
EXPOSED FOR FUTURE PAVEMENT WIDENING


REMOVABLE PCC CURB

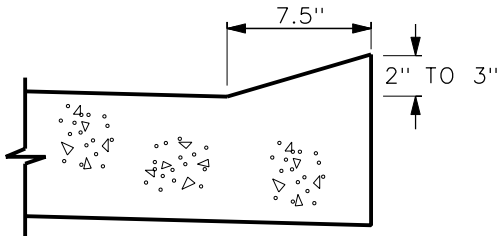


DRIVEWAY DROP CURB

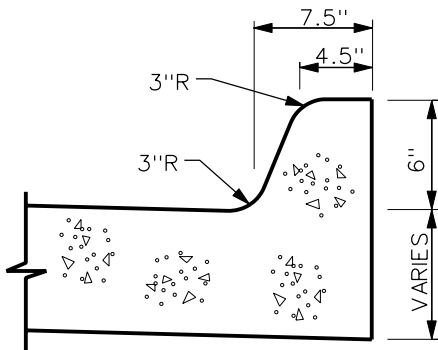

6" PCC INTEGRAL CURB

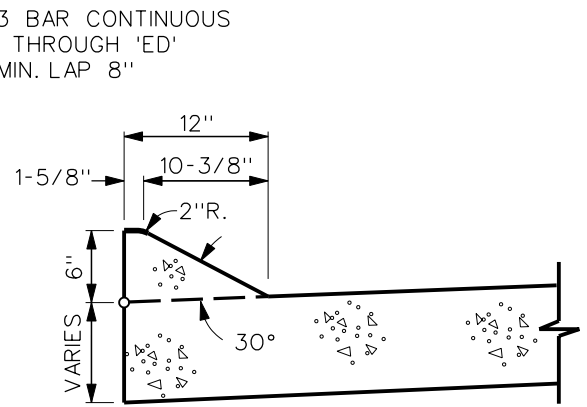


INTEGRAL 6" SLOPED CURB

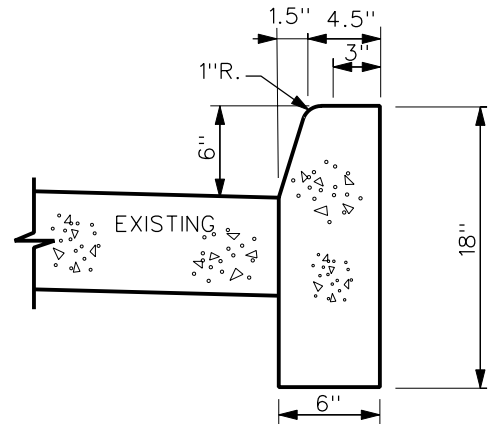

BEAM CURB*

*FOR SHORT REPLACEMENT
SECTIONS, MATCH EXISTING

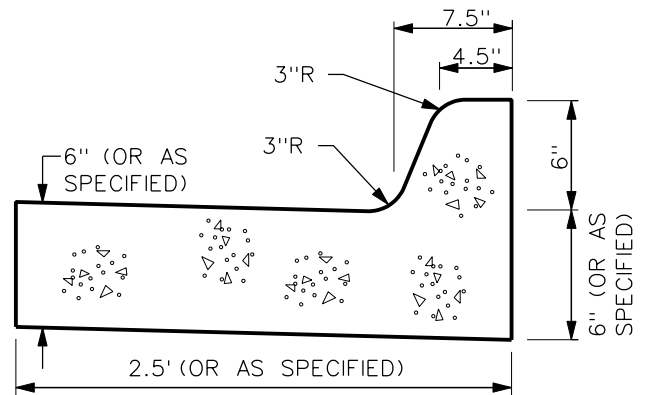

STANDARD PCC CURB & GUTTER*

* PROVIDE TRANSVERSE 'C' JOINTS THROUGH CURB
AND GUTTER AT A 15' SPACING

3	10/18/05			
REV.	DATE	BY	PCC CURB DETAILS	FIGURE: 7010.7A
DATE: 03-03-98				SHEET 1 OF 1