



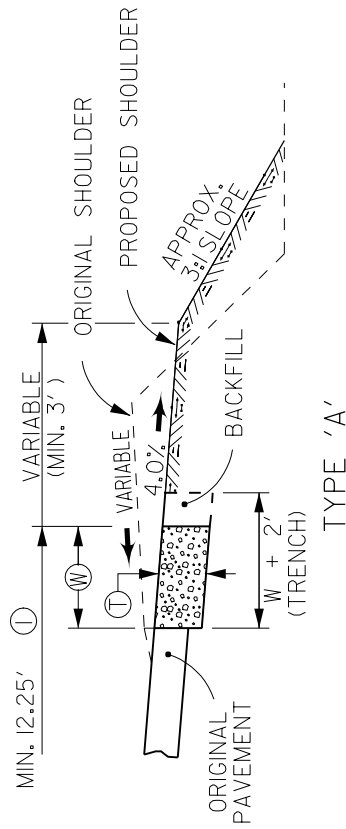


TYPE 'A'

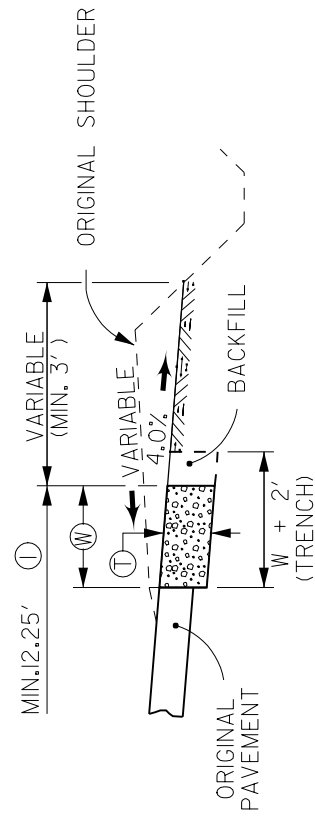


TYPE 'C'


TYPICAL DETAILS OF SHOULDERS FOR PAVEMENT WIDENING

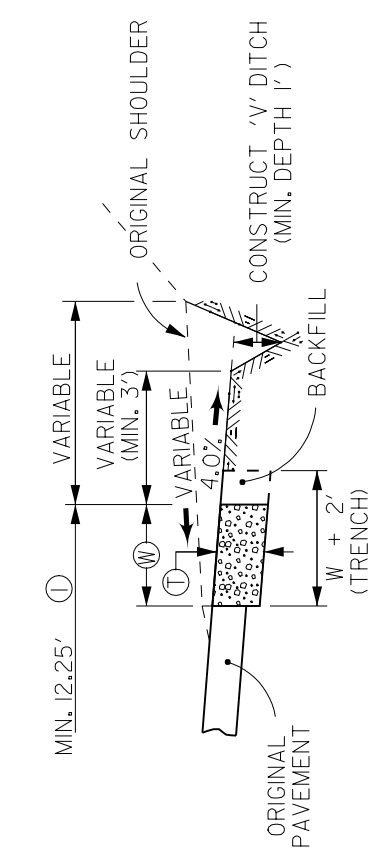


TYPE 'B'

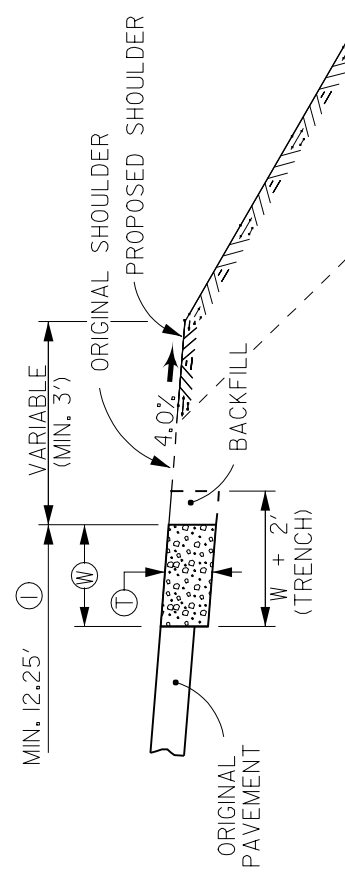

TYPE 'D'

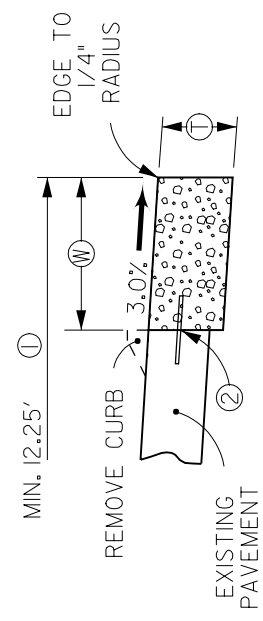

P.C. CONCRETE WIDENING ON EXISTING PAVEMENT WITH CURB

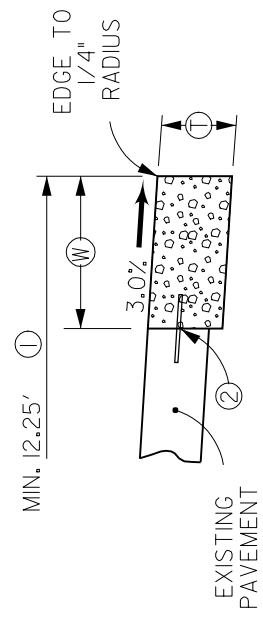

P.C. CONCRETE WIDENING ON EXISTING PAVEMENT WITHOUT CURB

TYPICAL DETAILS FOR PAVEMENT WIDENING

- ① MINIMUM SURFACE DIMENSION IS BASED ON ACCOMMODATING 3 INCHES OF RE-SURFACING. WHERE THICKNESS OTHER THAN 3 INCHES IS PROVIDED, THE SURFACE WIDTH SHOULD BE MODIFIED APPROPRIATELY.
- ② 'BT'-3' PLACED AT MID-HEIGHT UNLESS OTHERWISE NOTED.

REV.	DATE	BY
DATE:	01-01-98	

P.C. CONCRETE BASE
PAVEMENT WIDENING - RURAL