
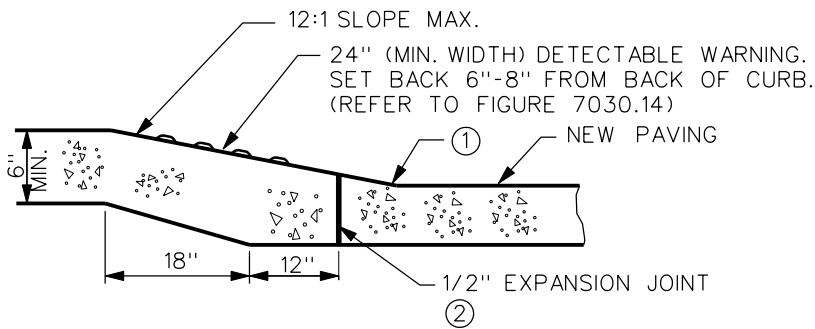


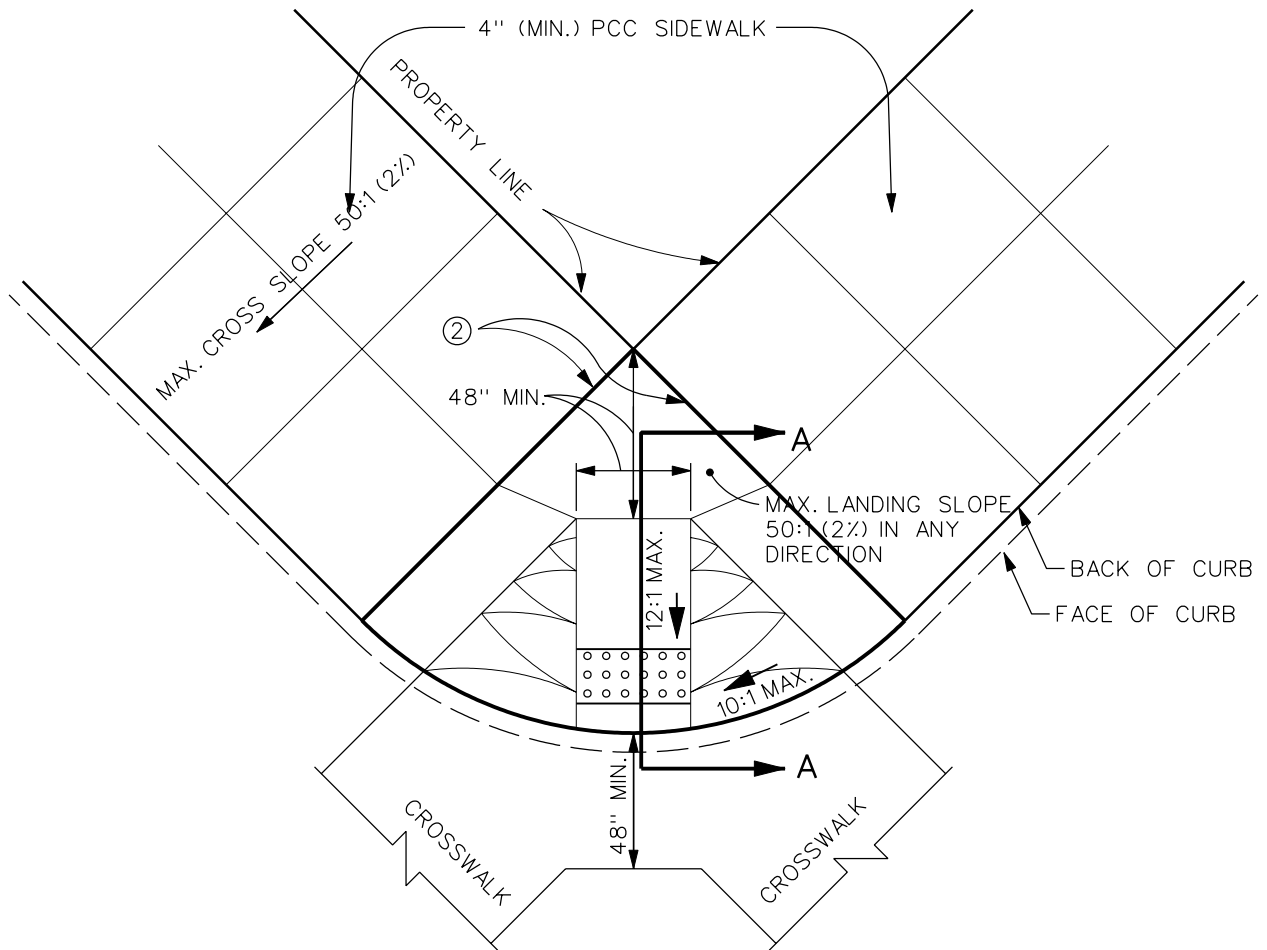

SECTION A-A

- ① THE MAXIMUM ALLOWABLE GRADE BREAK BETWEEN CURB RAMP AND GUTTER SLOPE SHALL BE 13%.
- ② PROVIDE A 1/2" EXPANSION JOINT AT THE BACK OF CURB. WHEN SPECIFIED, PROVIDE A KT-2 OR BT-3 JOINT BETWEEN THE SIDEWALK RAMP AND STREET PAVEMENT AND PLACE A 1/2" EXPANSION JOINT AT THE END OF THE STREET RADIUS.

NOTE:

USE OF THIS RAMP IS ACCEPTABLE ONLY IF RIGHT-OF-WAY RESTRICTIONS PROHIBIT USE OF RAMP SHOWN ON FIGURE 7030.10

4	10/18/05		OPTIONAL PEDESTRIAN RAMP WITHIN INTERSECTION RADIUS FOR CLASS "A" SIDEWALK	FIGURE: 7030.11
REV.	DATE	BY		SHEET 1 OF 1
DATE: 01-01-98				