

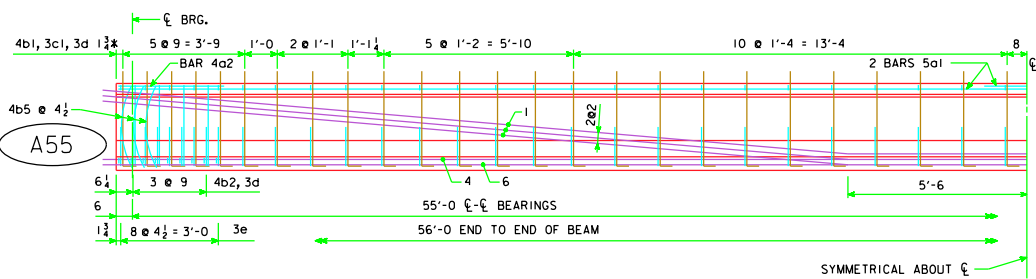
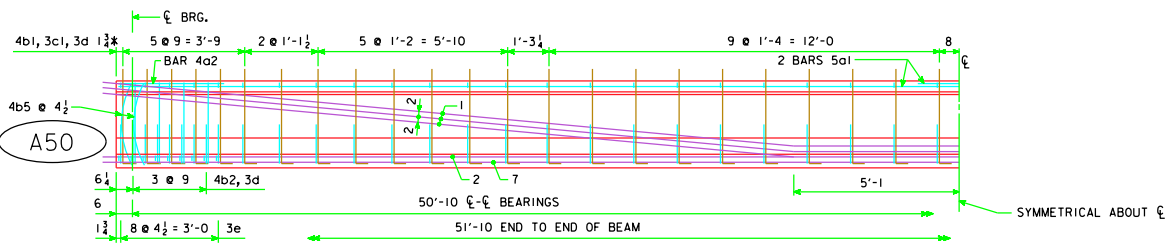
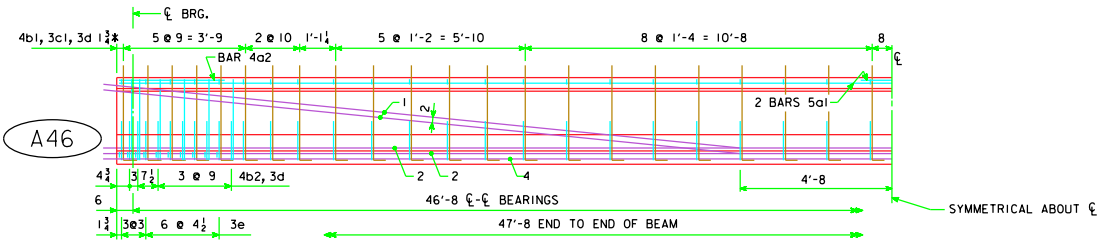
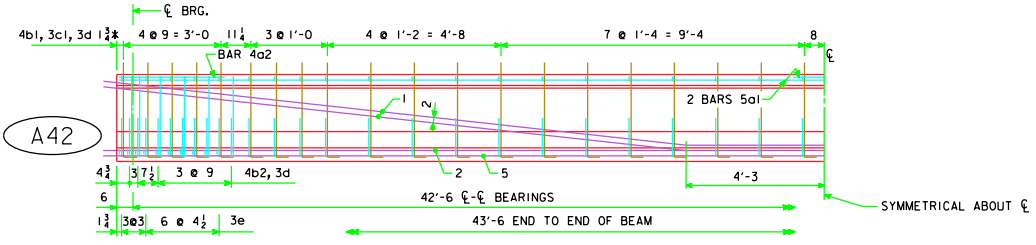
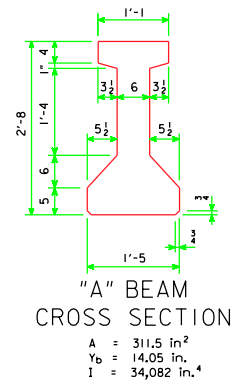




REVISED 07-10 - THE SPECIFICATION REFERENCES WERE CHANGED. THE BEAM DATA WAS UPDATED TO THE CURRENT BEAMS.



NOTE: DIMENSIONS FOR THE LOCATION OF THE DEFLECTED STRANDS ARE AT C-C BEAM AND END OF BEAM.



- NOTE: BARS 3d ARE TO BE PLACED IN PAIRS.
- DEFLECTED STRANDS
- \* KEEP
- △ DIMENSIONS AT END OF BEAM
- △△ EPOXY COATED BARS

07-10 LATEST REVISION DATE	 APPROVED BY BRIDGE ENGINEER		<b>Iowa Department of Transportation</b> <b>Highway Division</b> STANDARD DESIGN - 30' ROADWAY, THREE SPAN BRIDGES <b>PRETENSIONED PRESTRESSED</b> <b>CONCRETE BEAM BRIDGES</b> DECEMBER, 2006
		<b>A BEAM DETAILS</b>	<b>H30-33-06</b>