



**PART LONGITUDINAL SECTION NEAR GUTTER**  
(FOR DETAILS OF INTERMEDIATE DIAPHRAGM SEE SHEET H30S1-30-12)

**PART END VIEW AT ABUTMENT**  
PROVIDE ELEVATIONS A AND B IN THE BRIDGE PLAN SHEETS.


NOTE: PLUG 3" PVC PIPE WITH EXPANDING FOAM PRIOR TO BACKFILLING BEHIND ABUTMENTS.

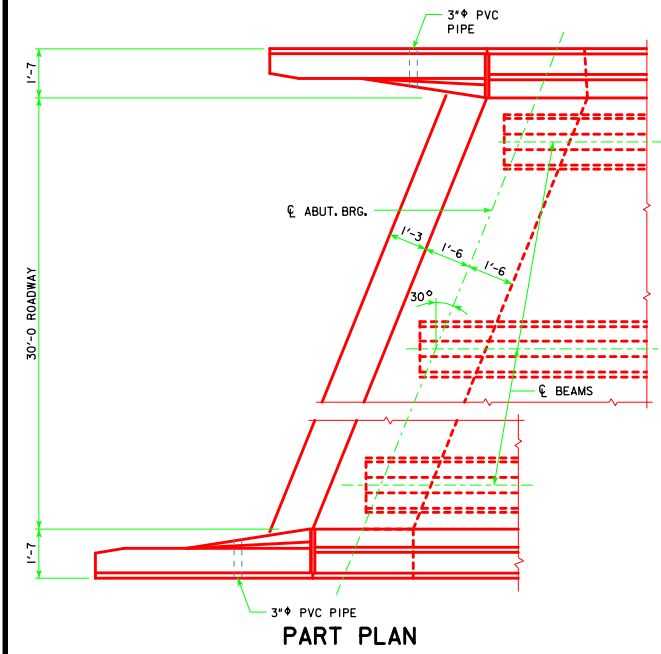


**PART PLAN**

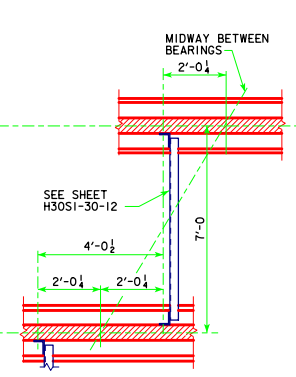


**SECTION B-B**



**DETAIL "C"**  
(PAVING BLOCK NOT SHOWN)

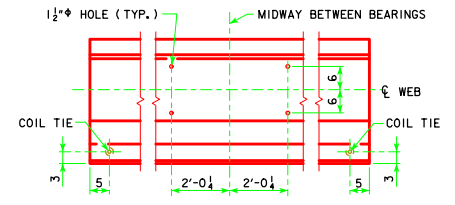

**LOCATION OF BEAM COIL TIES AND STEEL DIAPHRAGM BOLT HOLES**

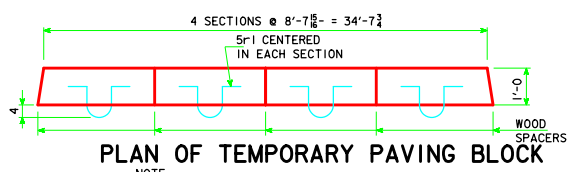

**PLAN OF TEMPORARY PAVING BLOCK**

NOTE: LINE PAVING NOTCH WITH TAR PAPER BEFORE PLACING THE TEMPORARY PAVING BLOCK.

LATEST REVISION DATE	
	STANDARD DESIGN - 30' ROADWAY, SINGLE SPAN BRIDGE <b>PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES</b> APRIL, 2012
	<b>LONGITUDINAL SECTION H30S1-17-12</b> 30° SKEW A & B BEAMS