


HALF SECTION NEAR PIER

SHOWING STIRRUP SPACING AND NUMBER OF PILING
NOTE: BOTTOM OF CAP ELEVATIONS WILL BE REQUIRED AT THE
C OF ROADWAY AND AT EACH EXTERIOR PILE.

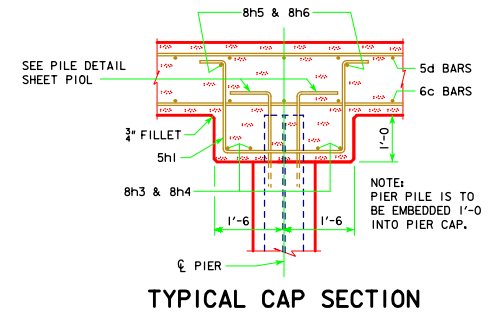

LATEST REVISION DATE	 APPROVED BY BRIDGE ENGINEER	 STANDARD DESIGN - 40' ROADWAY, 3 SPAN BRIDGES CONTINUOUS CONCRETE SLAB BRIDGES JULY, 2014
		MONOLITHIC PIER CAP DETAILS ALL BRIDGES
		J40-26-14