
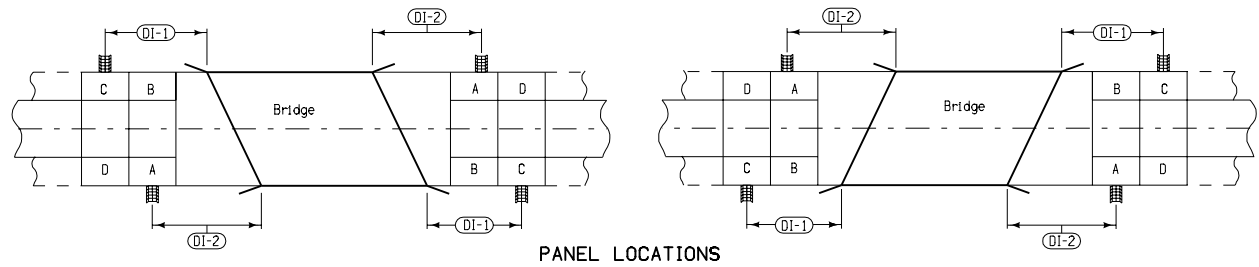


Price bid for "Bridge End Drain, RF-39" shall be considered full compensation for furnishing, installing, and constructing the Bridge End Drain as shown.

Contract Items:
 Paved Shoulder, P.C. Concrete
 Bridge End Drain, RF-39
 Incidental to Paved Shoulder:
 Modified Subbase
 Polymer Grid
 Incidental to Bridge End Drain:
 Sodding with specified anchoring method
 Macadam Stone Base Material
 Special shaping
 Tabulation: 104-8A

- ① Paved shoulder panel will be paid for as "Paved Shoulder, P.C. Concrete".
- ② Modified subbase and polymer grid shall be installed under shoulder panels as shown in Section A-A on Standard Road Plan RK-20, RK-25, or RK-26.
- ③ Sod Flume shall be located 5 feet or more from the nearest transverse pavement joint. Joints are determined by the bridge approach section.
- ④ Sod flume shall extend to ditch bottom.

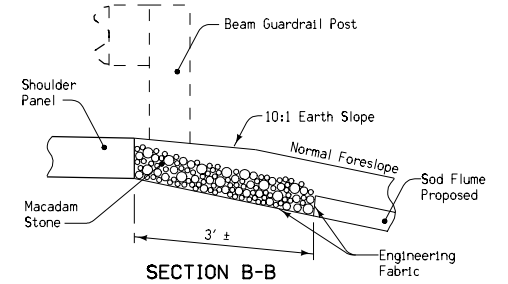

Iowa Department of Transportation STANDARD ROAD PLAN	REVISION
	12 04-17-07
	RF-39
	SHEET 1 of 1
REVISIONS: Changed note on Section A-A.	
<i>Deanna Mayfield</i> APPROVED BY DESIGN METHODS ENGINEER	
SOD FLUME FOR BRIDGE END DRAIN	