



**INTERSTATES**

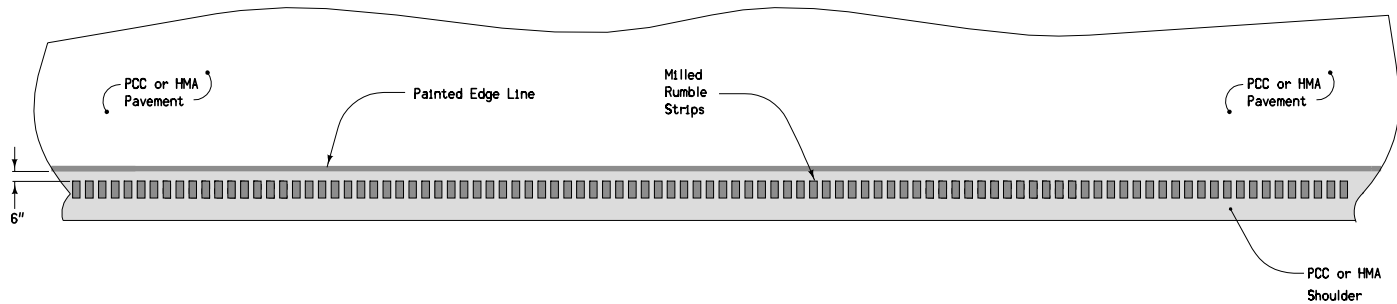


**MILLED RUMBLE STRIP DETAILS**

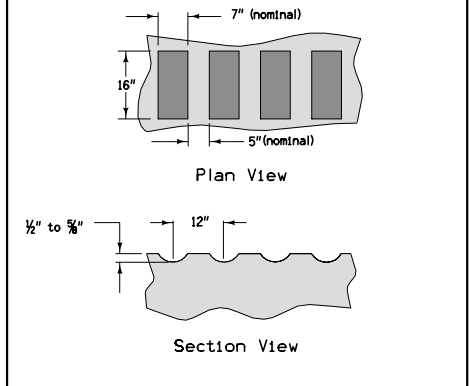

- ① Milled rumble strips shall be continuous (no 12-foot gaps) on median-side shoulders of non-interstates.


**NON - INTERSTATES**

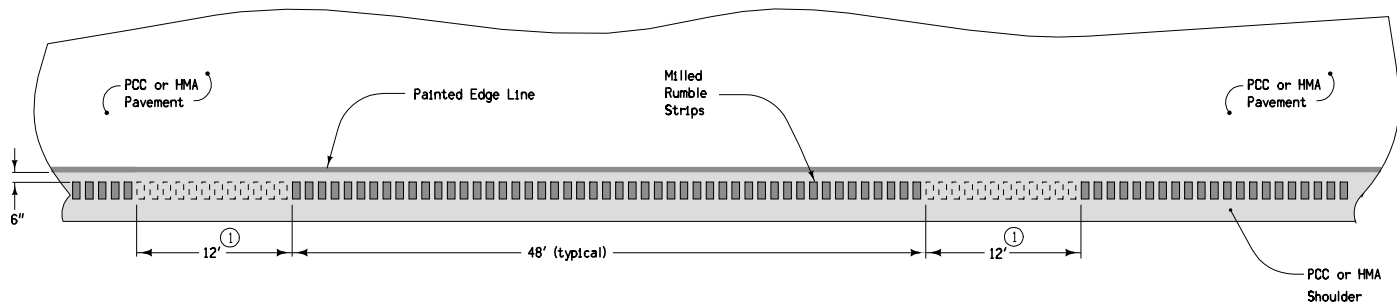


Contract items:

- Milled Shoulder Rumble Strips, HMA Surface Asphalt Emulsion for Fog Seal (Shoulders)
- OR
- Milled Shoulder Rumble Strips, PCC Surface

<p>Iowa Department of Transportation</p> <p><b>STANDARD ROAD PLAN</b></p>	<p>REVISION</p> <p>1 04-15-08</p>
	<p><b>RH-64</b></p> <p>SHEET 1 of 2</p>
<p>REVISIONS: Moved milled rumble strips to 6" from the paint line for all cases. Clarified 50' dimension on sheet 2.</p>	
<p><i>Deanna Macfild</i></p> <p>APPROVED BY DESIGN METHODS ENGINEER</p>	
<p><b>MILLED SHOULDER RUMBLE STRIPS</b></p>	

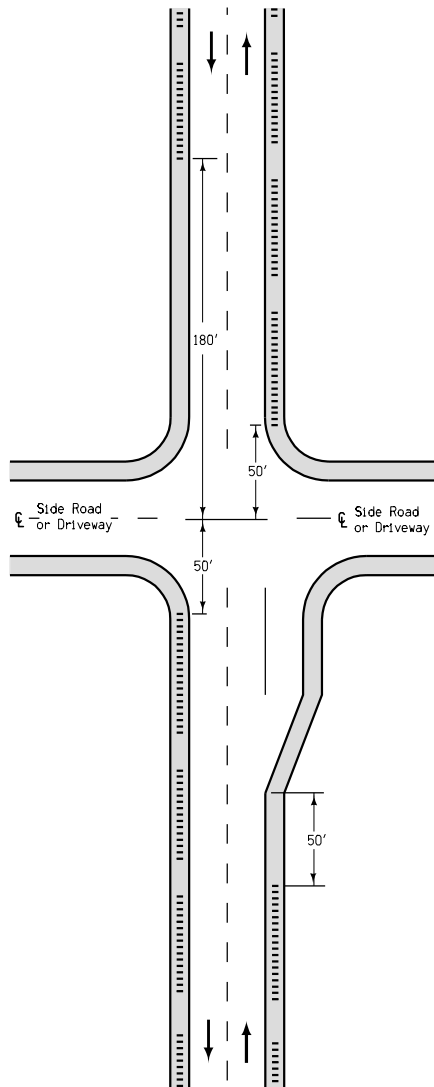


UNDIVIDED HIGHWAYS

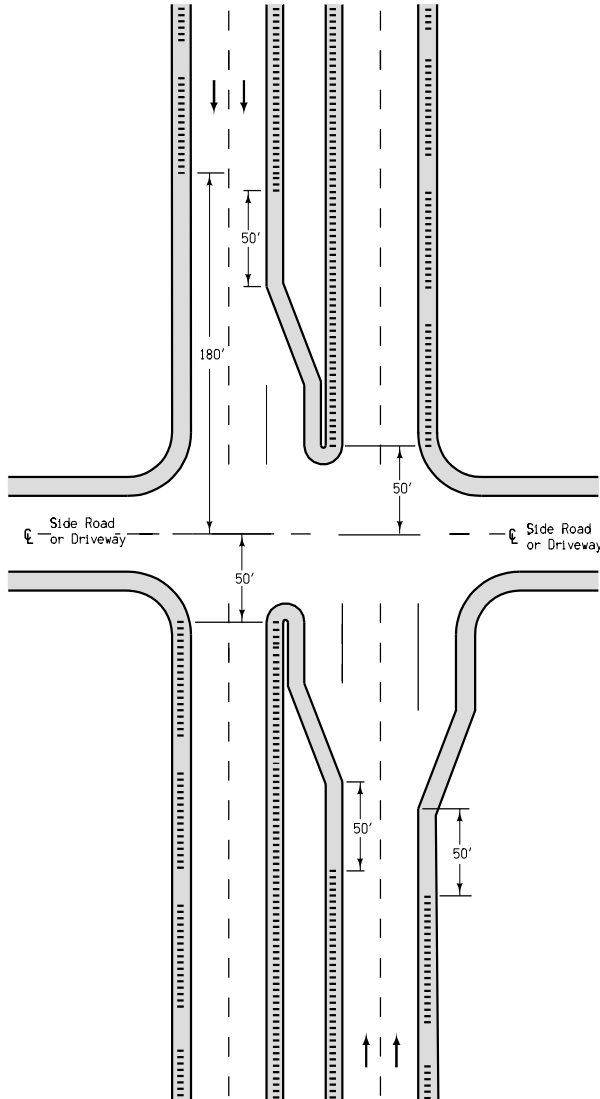

DIVIDED HIGHWAYS

INTERSECTION SITUATIONS

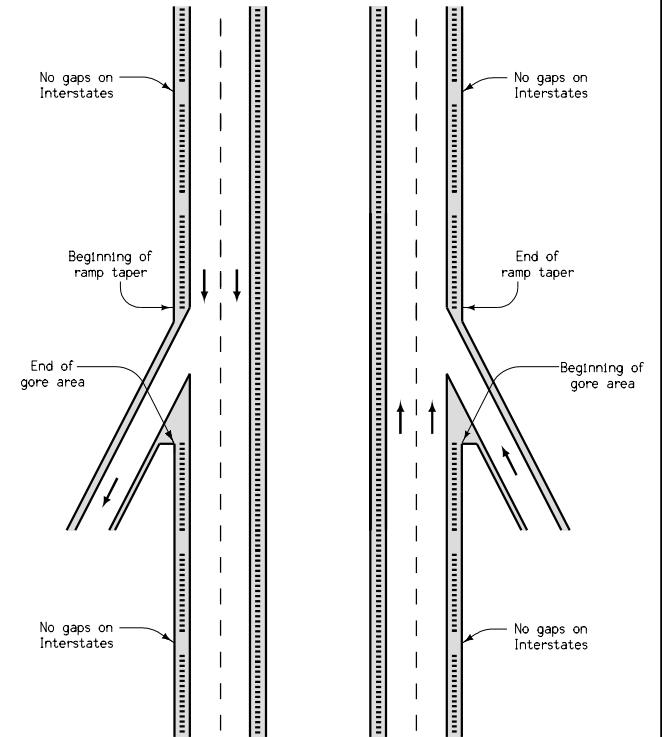

RAMPS AND LOOPS

<p>Iowa Department of Transportation</p>	REVISION
	1   04-15-08
<b>STANDARD ROAD PLAN</b>	<b>RH-64</b>
	SHEET 2 of 2
<small>REVISIONS: Moved milled rumble strips to 6" from the paint line for all cases. Clarified 50' dimension on sheet 2.</small>	
<i>Deanna Macfadyen</i> <small>APPROVED BY DESIGN METHODS ENGINEER</small>	
<p><b>MILLED SHOULDER RUMBLE STRIPS</b></p>	