



PAVEMENT REMOVAL DETAILS  
LONGITUDINAL SECTION

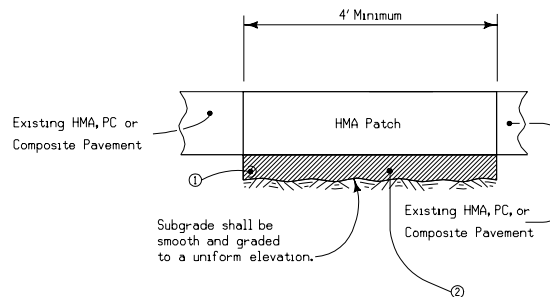

SECTION A-A


- ① If longitudinal subdrain (shoulder) is not to be placed or if not present on the side of the roadway to be patched, then place proposed 3" slotted corrugated pipe at low end of patch.
- ② 6 inches granular subbase if required by plan. When placed, granular subbase should extend over longitudinal subdrain, if present.

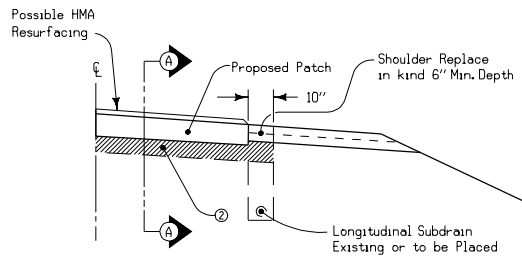

GRANULAR SUBBASE AND SUBDRAIN

( WHEN REQUIRED BY PLAN )



IF LONGITUDINAL SUBDRAIN IS PRESENT OR IS TO BE PLACED

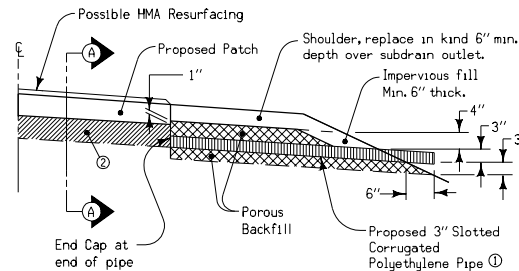

GRANULAR SUBBASE AND SUBDRAIN

( WHEN REQUIRED BY PLAN )

WITHOUT LONGITUDINAL SUBDRAIN

 Iowa Department of Transportation	REVISION	
	1	10-17-06
<b>STANDARD ROAD PLAN</b>		<b>RR-10</b>
		SHEET 1 of 1
REVISIONS: Change Concrete Removal Area to Pavement Removal Area		
 APPROVED BY DESIGN METHODS ENGINEER		
<b>FULL DEPTH PATCH HOT MIX ASPHALT (EXISTING HMA, PC, OR COMPOSITE PAVEMENT)</b>		