




**TYPE 1
SHOULDER INSTALLATION**




**TYPE 2
CURB INSTALLATION**




**TYPE 3
BRIDGE BARRIER RAIL INSTALLATION**

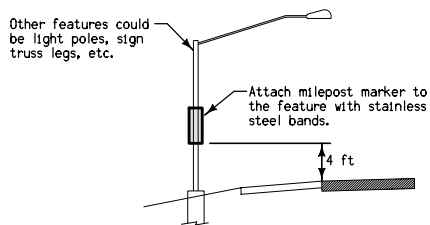


**TYPE 4
ATTACHMENT TO OTHER FEATURE**

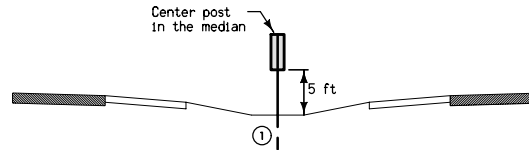


**TYPE 5
DEPRESSED MEDIAN INSTALLATION**

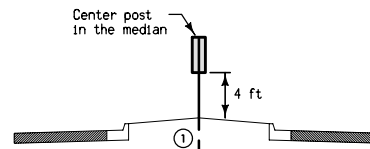

**TYPE 6
RAISED MEDIAN INSTALLATION**



**TYPE 7
FULL MEDIAN BARRIER RAIL INSTALLATION**




**TYPE 8
SPLIT MEDIAN BARRIER RAIL INSTALLATION**

The Contractor shall furnish Type 1 delineator posts for each location unless specified otherwise in the plans.


Price bid for Milepost Marker shall be full compensation for all installation work and materials necessary as detailed hereon. This includes furnishing the delineator post (if required), and all necessary hardware to attach the milepost marker to delineator post, bracket, or other feature.

① Post length shall be sufficient to provide a minimum of 30 inches of embedment when installed at the specified mounting height.




**TYPE 9
SPLIT MEDIAN BARRIER RAIL INSTALLATION
WITH GRADE DIFFERENTIAL**

Aluminum bolts, self-locking nuts, and washers.
 $\frac{5}{16}$ " x $2\frac{1}{4}$ " - 18 NC hex bolts and hex self-locking nuts with washers $\frac{1}{2}$ " I.D. x $\frac{1}{16}$ " O.D. x 0.091".

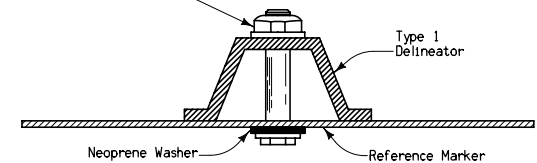


**MILEPOST MARKER ASSEMBLY
TOP VIEW**

	IOWA DEPARTMENT of Transportation	REVISION NEW 04-21-09
	STANDARD ROAD PLAN	SI-171 SHEET 1 of 4
REVISIONS: New.		
APPROVED BY DESIGN METHODS ENGINEER <i>Deanna Mailfield</i>		
REFERENCE POSTS		

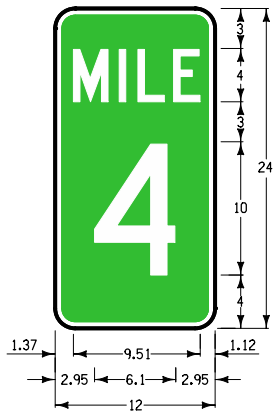


1.50" Radius, 0.50" Border, White on Green;
[MILE] C; [4] C;

D10-1A

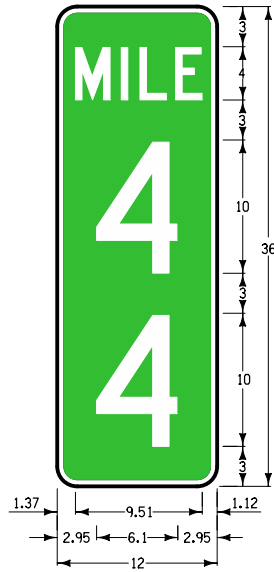


1.50" Radius, 0.50" Border, White on Green;
[MILE] C; [4] C; [4] C;

D10-2A

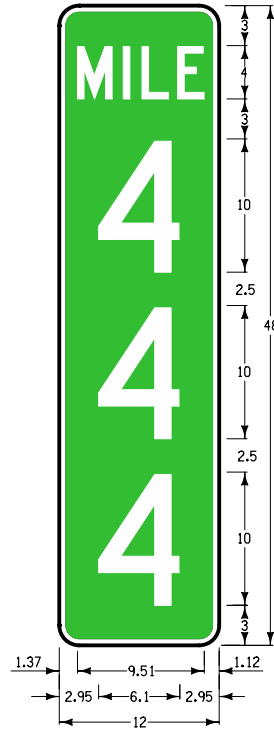


1.50" Radius, 0.50" Border, White on Green;
[MILE] C; [4] C; [4] C; [4] C;

D10-3A




1.50" Radius, No border,
White on Black;

D10-5A




1.50" Radius, No border,
White on Black;

D10-6A




1.50" Radius, 0.50" Border, White on Green;
[A] E;

D10-7A




1.50" Radius, 0.50" Border, White on Green;
[AH] C 50± spacing;


D10-8A



1.50" Radius, 0.50" Border, White on Green;
[BK] C 50± spacing;


D10-9A

 Iowa Department of Transportation	REVISION
	NEW 04-21-09
STANDARD ROAD PLAN	SI-171
REVISIONS: New.	SHEET 2 of 4
<i>Deanna Midfield</i> APPROVED BY DESIGN METHODS ENGINEER	
REFERENCE POSTS	

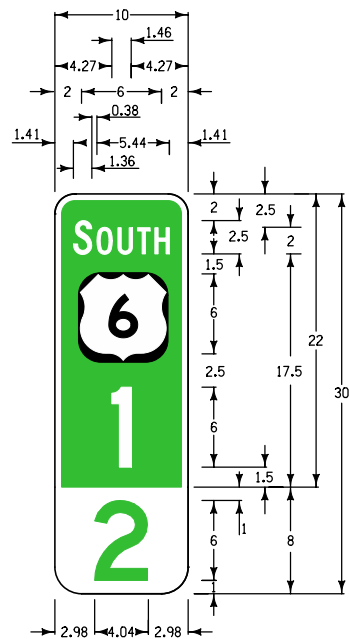


1.50" Radius, 0.50" Border, White on Green;
 [SOUTH] C; [1] D;
 1.50" Radius, 0.00" Border, White on White;
 [2] Green D;

D10-1D

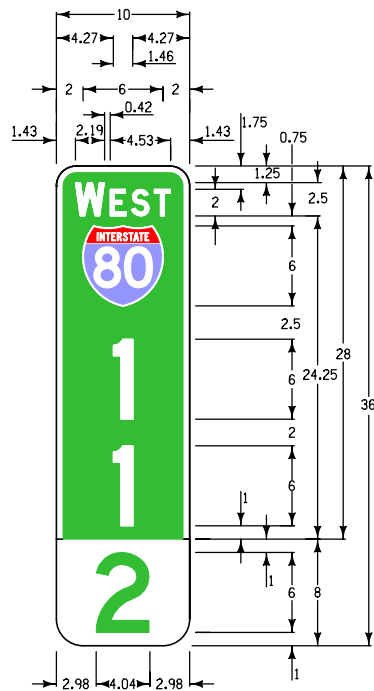


1.50" Radius, 0.50" Border, White on Green;
 [WEST] D; [1] D; [1] D;
 1.50" Radius, 0.00" Border, White on White;
 [2] Green D;


D10-2D

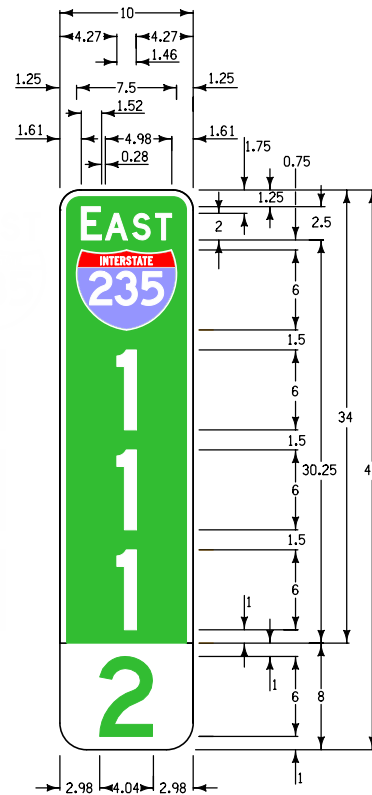

1.50" Radius, 0.50" Border, White on Green;
 [EAST] D; [1] D; [1] D; [1] D;
 1.50" Radius, 0.00" Border, White on White;
 [2] Green D;


D10-3D

 Iowa Department of Transportation	REVISION NEW 04-21-09
	SI-171 SHEET 3 of 4
STANDARD ROAD PLAN	
REVISIONS: New.	
<i>Deanna Midfield</i> APPROVED BY DESIGN METHODS ENGINEER	
REFERENCE POSTS	

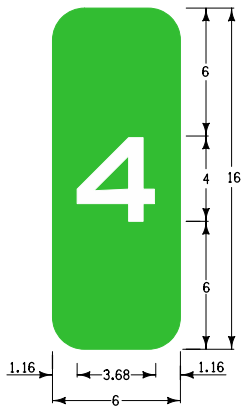


1.50" Radius, No border, White on Green;
[4] E;

D10-1

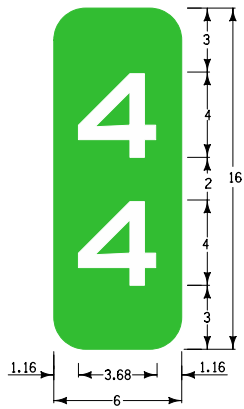


1.50" Radius, No border, White on Green;
[4] E; [4] E;

D10-2

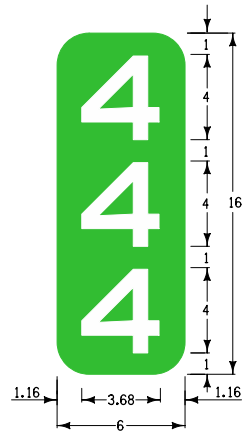


1.50" Radius, No border, White on Green;
[4] E; [4] E; [4] E;

D10-3




1.50" Radius, No border, White on Black;

D10-5




1.50" Radius, No border, White on Black;

D10-6




1.50" Radius, No border, White on Green;
[A] E;

D10-7




1.50" Radius, No border, White on Green;
[AH] C;

D10-8



1.50" Radius, No border, White on Green;
[BK] C;

D10-9

 Iowa Department of Transportation	REVISION
	NEW 04-21-09
STANDARD ROAD PLAN	SI-171
REVISIONS: New.	SHEET 4 of 4
<i>Deanna Midfield</i> APPROVED BY DESIGN METHODS ENGINEER	
REFERENCE POSTS	