




**TYPICAL LEVELING COURSE**  
(See Tabulation for Location)

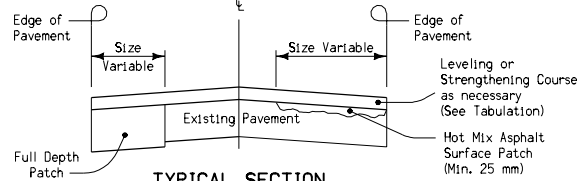


**TYPICAL SECTION FULL DEPTH AND SURFACE PATCHES**

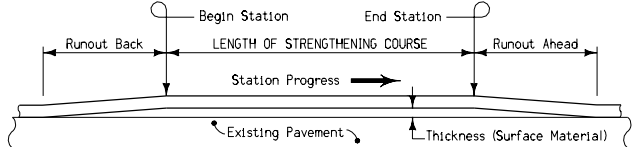


**TYPICAL STRENGTHENING COURSE**  
(See Tabulation for Location)

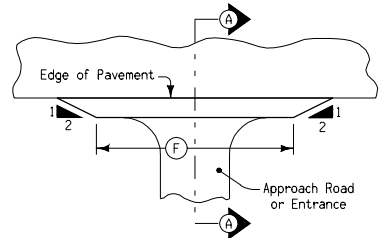


**TYPICAL PLAN FOR FILLET AT ENTRANCE OR INTERSECTING ROAD**

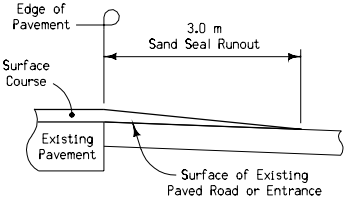

**SECTION A-A (WEDGE SHAPED FILLET)**

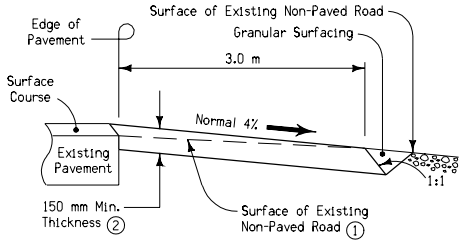

**SECTION A-A (FULL THICKNESS FILLET - NON-PAVED ROAD)**

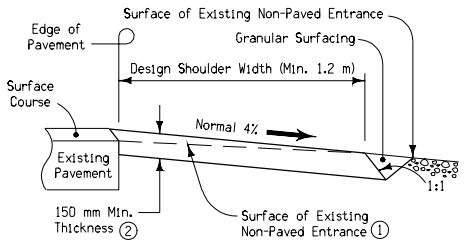

**SECTION A-A (FULL THICKNESS FILLET - NON-PAVED ENTRANCE)**

| NORMAL FILLET SIZES  |              |
|----------------------|--------------|
| TYPE OF ACCESS       | (F) Min. - m |
| Residential Entrance | 12           |
| Farm Entrance        | 18           |
| Commercial Entrance  | 24           |
| Non-Paved Road       | 30           |
| Paved Road           | Variable*    |

\* See layout drawing for details of construction of special areas.

**GENERAL NOTES:**

Refer to typical cross sections of the project for detail data as to exact course dimensions and other construction requirements.

Refer to tabular listing for location and other details of runouts.

Unless otherwise specifically noted, full runout for HMA resurfacing shall be at the rate of 6 meters of length for each 10 millimeters of resurfacing thickness. Place subgrade paper, burlap, or similar material over adjacent surfaces in areas of runout wedges to facilitate removal of wedges where subsequent future resurfacing is anticipated. Temporary runout shall be at the rate of 1.2 meters length for each 10 millimeters of resurfacing thickness.

Design Density = 2325 kilograms per cubic meter

Tack Coat = 0.2 liters per square meter  
For quantitative purposes, it is estimated that 2 applications are necessary.

Sand seal shall be constructed in accordance with current Standard Specification for Hot Mix Asphalt Mixtures.

Wedge shaped fillets of HMA shall be constructed at all paved entrances and paved intersecting roads. Full thickness fillets shall be constructed at all non-paved residential and commercial entrances and non-paved public roads.

Fillet sizes as listed in the table are recommended and shall be used for design and estimating purposes. The Engineer shall establish the length and width of each individual fillet to accommodate conditions at the site.

- Special shaping of existing surface prior to placement of fillet may be required by the Engineer and shall be considered incidental to other work on the project.
- For existing fillets at non-paved roads and entrances, a wedge shaped fillet matching the thickness of the resurfacing should be constructed.

All dimensions given in millimeters unless noted.

|  |  |                           |
|--|--|---------------------------|
| <b>METRIC VERSION</b>  | <b>M</b> Iowa Department of Transportation<br>Highway Division |                           |
|  | <b>STANDARD ROAD PLAN RG-6</b>                                 |                           |
|  | REVISION: Changed ACC to HMA                                   | REVISION NO.<br>11        |
|  | <i>William J. Steen</i><br>APPROVED BY DESIGN METHODS ENGINEER | REVISION DATE<br>10-02-01 |
| <b>DETAILS FOR HOT MIX ASPHALT RESURFACING (SINGLE COURSE)</b> |  |                           |