



TYPE A-1 CLEANOUT

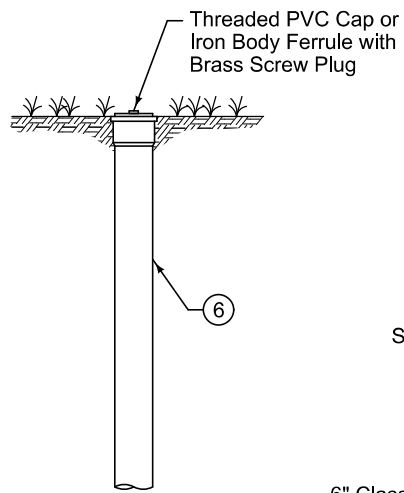


TYPE A-2 CLEANOUT

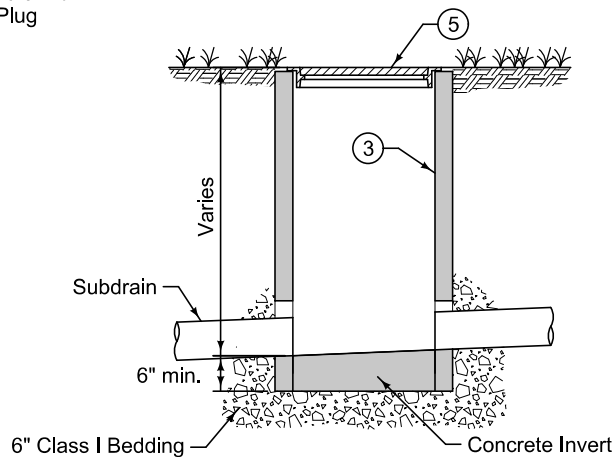


TYPE B CLEANOUT

Use in non-traffic areas.


- ① Light duty casting. Label lid with "Storm" or "Storm C.O."
- ② Do not allow casting to bear on top of riser pipe; provide 2 inch clearance, minimum.
- ③ A manufactured cleanout may be used in lieu of a Type B cleanout, if approved by the Engineer.
- ④ Design is intended for use in conjunction with 8 inch PVC riser pipe. Other sized caps may be used with smaller pipe, as approved by the Engineer.
- ⑤ Provide Type G casting, as required to fit pipe size.
- ⑥ PVC riser pipe; match diameter of subdrain (8 inches maximum).

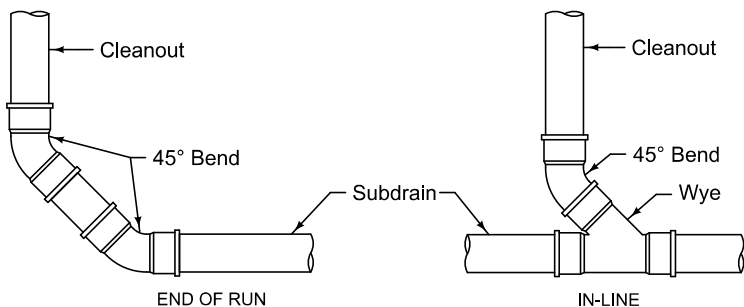

TYPE A CLEANOUT CONNECTIONS

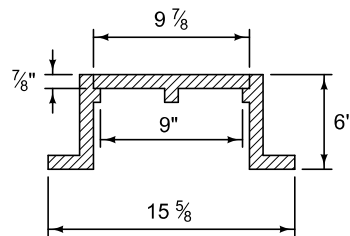

DETAIL A ① ④  
(Dimensions are nominal)

	<small>REVISION</small> 3   2020 Edition
	<b>SUDAS</b> <b>4040.232</b>
	<small>SHEET 1 of 1</small>
<b>SUDAS Standard Specifications</b>	
<b>SUBDRAIN CLEANOUTS</b>	