



Provide expansion joint at 48'-0" max. spacing (top and bottom rail). See expansion sleeve detail.

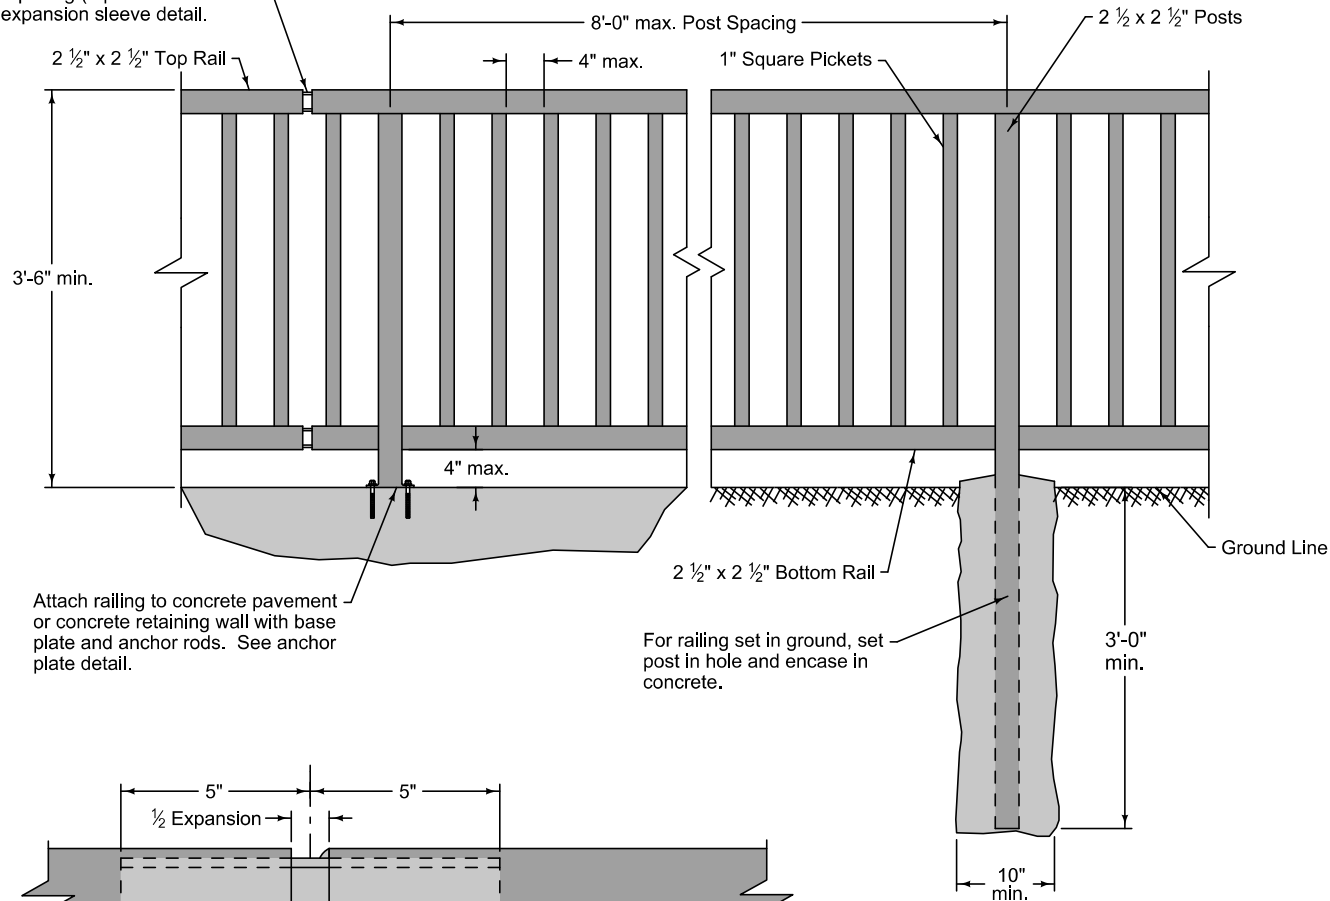


Weld all components with 1/4 inch fillet welds. Grind welds and connections as required to provide a smooth surface, free of burrs.

Field paint safety rail after installation as specified in the contract documents.

① Detail shown is for top rail. Expansion joint for bottom rail is similar.

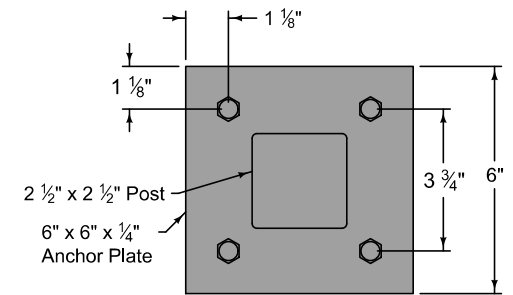

ANCHOR PLATE DETAIL

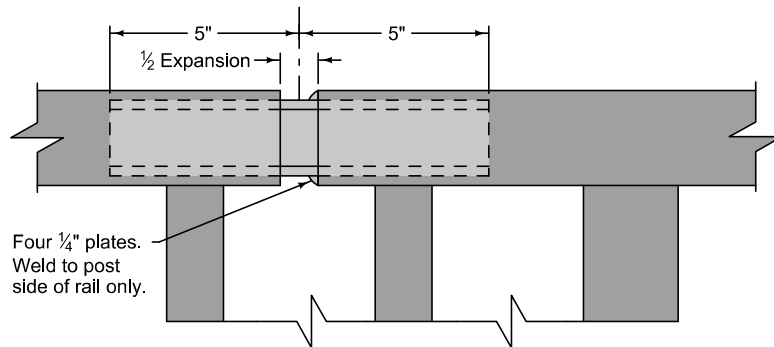

EXPANSION SLEEVE DETAIL

①

	REVISION 1   10-16-18
	<b>SUDAS 9080.103</b>
	SHEET 1 of 1
SUDAS Standard Specifications	
<b>SAFETY RAIL</b>	