
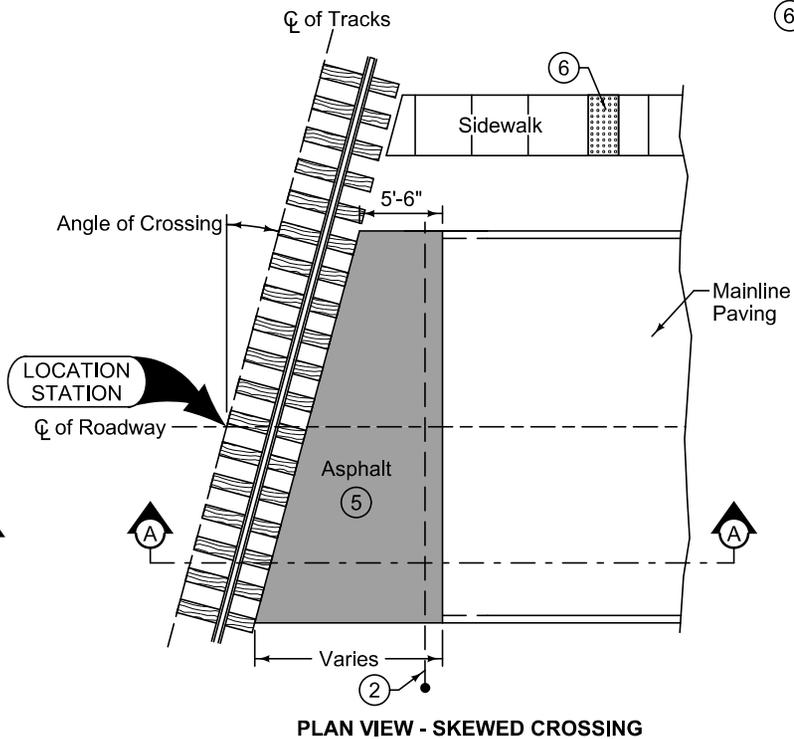


- ① Asphalt mainline paving.
- ② Install 6 inch perforated CMP subdrain, if specified. Include rodent guard per Iowa DOT Materials I.M. 443.01.
- ③ Granular subbase, modified subbase, or ballast meeting railroad specifications.
- ④ For new crossings, construct pavement 1/2 inch to 1 inch below top of rail. For existing crossings, construct pavement level to 1/2 inch below top of rail.
- ⑤ Construct asphalt approach according to the requirements for full depth asphalt patching or the requirements for asphalt paving if constructed in conjunction with mainline asphalt.
- ⑥ Refer to Figure 7030.205 for detectable warning location.

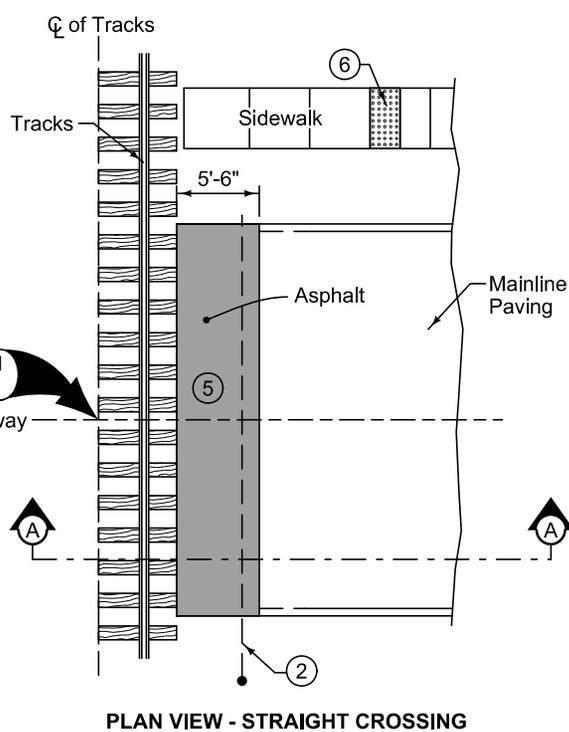

| | |
|---|---|
|  SUDAS | <small>REVISION</small> 3 2023 Edition |
| | 7020.902 |
| | <small>SHEET 1 of 1</small> |
| SUDAS Standard Specifications | |
| ASPHALT RAILROAD CROSSING APPROACH | |